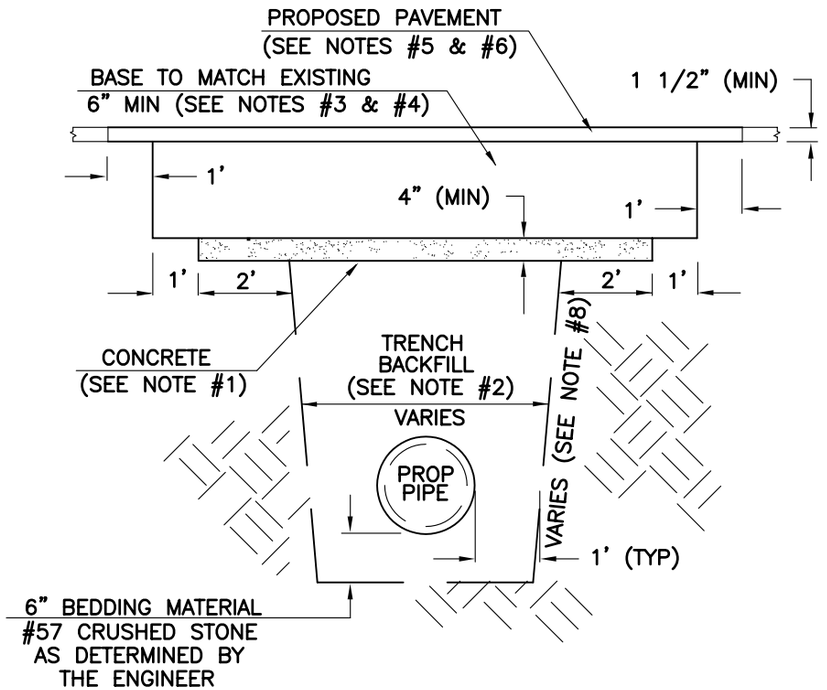

ALTERNATE 1

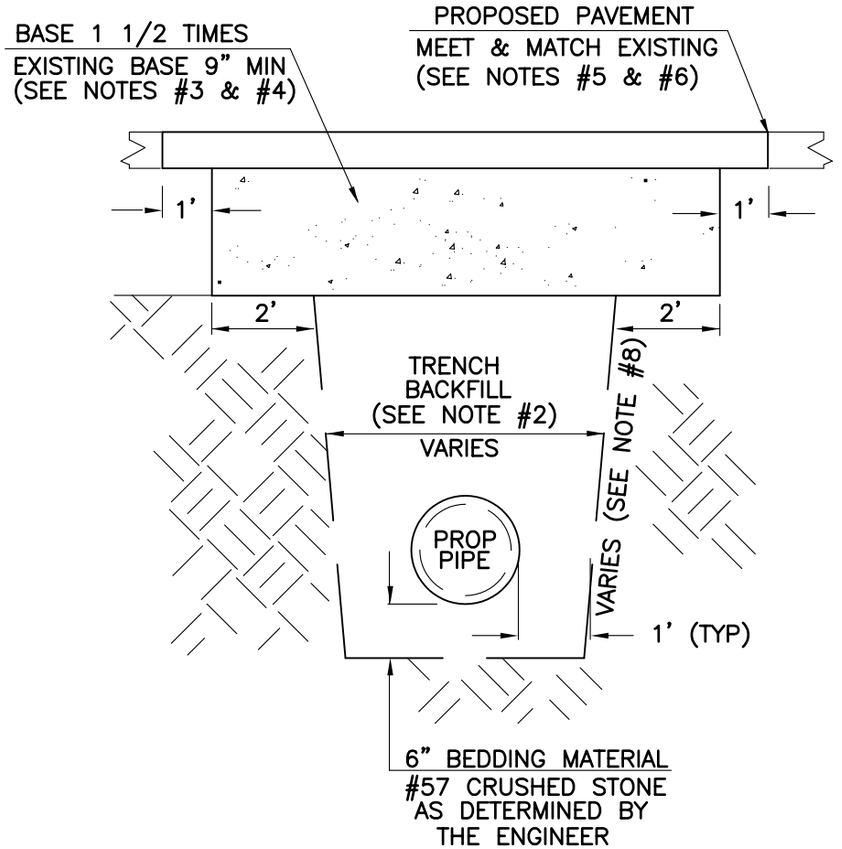

ALTERNATE 2

NOTES

1. FOR ALTERNATE 1, USE 3000 PSI HIGH, EARLY-STRENGTH CONCRETE OR OTHER APPROVED HIGH STRENGTH FAST-SET MATERIALS.
2. BACKFILL FOR TRENCH SHALL BE PLACED IN 12" COMPACTED LAYERS TO 100% OF MAXIMUM DENSITY AS DETERMINED BY AASHTO T-99. (FLOWABLE FILL OPTION IS SUBJECT TO ENGINEERS APPROVAL). TEST REPORTS ARE REQUIRED AND SUBMITTED TO PINELLAS COUNTY.
3. BASE MATERIAL SHALL BE PLACED IN 6" COMPACTED LAYERS TO 98% OF MAXIMUM DENSITY AS DETERMINED BY AASHTO T-180. (TEST REPORTS ARE REQUIRED).
4. AS AN ALTERNATIVE TO COMPACTED BASE AND IN WET AREAS, FULL-LIFT PC-2 OR PC-3 ASPHALTIC CONCRETE SHALL BE PLACED IN 2" COMPACTED LAYERS, NOT LESS THAN 6" THICK.
5. ASPHALTIC CONCRETE PAVEMENT JOINTS SHALL BE SAW-CUT AND ALL SURFACES TACK COATED.
6. SURFACE SHALL BE CONSISTENT WITH EXISTING SURFACE AND THICKNESS WITH MINIMUM OF 1 1/2" ASPHALT PAVEMENT, IN ACCORDANCE WITH PINELLAS COUNTY SPECIFICATIONS.
7. OVERLAY OF CONSTRUCTION SCARS TO PAVEMENT AND TRENCH SHALL BE REQUIRED AS DIRECTED BY THE ENGINEER OR INSPECTOR.
8. EXCAVATION SHALL COMPLY WITH THE TRENCH SAFETY ACT REQUIREMENTS.

DEPARTMENT OF PUBLIC WORKS

PINELLAS COUNTY, FLORIDA

PAVEMENT CUTS, EXCAVATION & RESTORATION

APPROVED BY:	DATE	SHEET	INDEX
DIRECTOR OF PUBLIC WORKS	8/96	1 of 1	1291