


PROFILE VIEW OF CURB & GUTTER

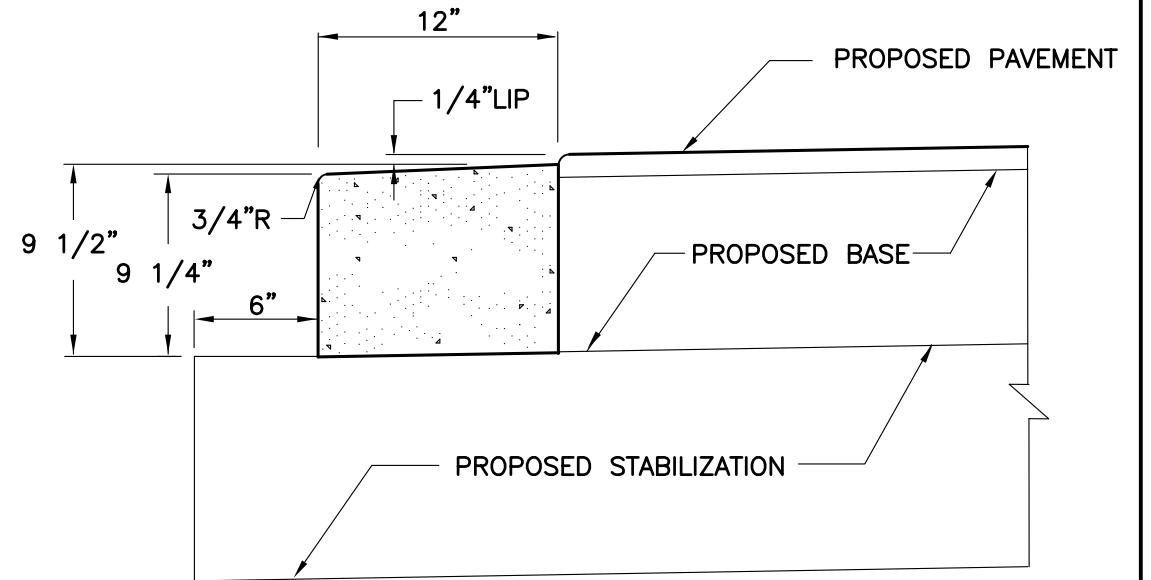

PROFILE VIEW OF HEADER CURB

NOTE:

1/2" EXPANSION JOINT EVERY 500', BETWEEN CURB SECTIONS, AT RADII, END OF POUR AND STRUCTURES. (FALSE JOINTS EVERY 10', LONGITUDINALLY. SEE SECTION 520 OF THE FDOT STANDARD SPECIFICATIONS.)

DEPARTMENT OF PUBLIC WORKS			
PINELLAS COUNTY, FLORIDA			
CURB AND GUTTER TYPE A AND HEADER CURB			
APPROVED BY:	DATE	SHEET	INDEX
_____ DIRECTOR OF PUBLIC WORKS	8/96	1 of 1	1305