
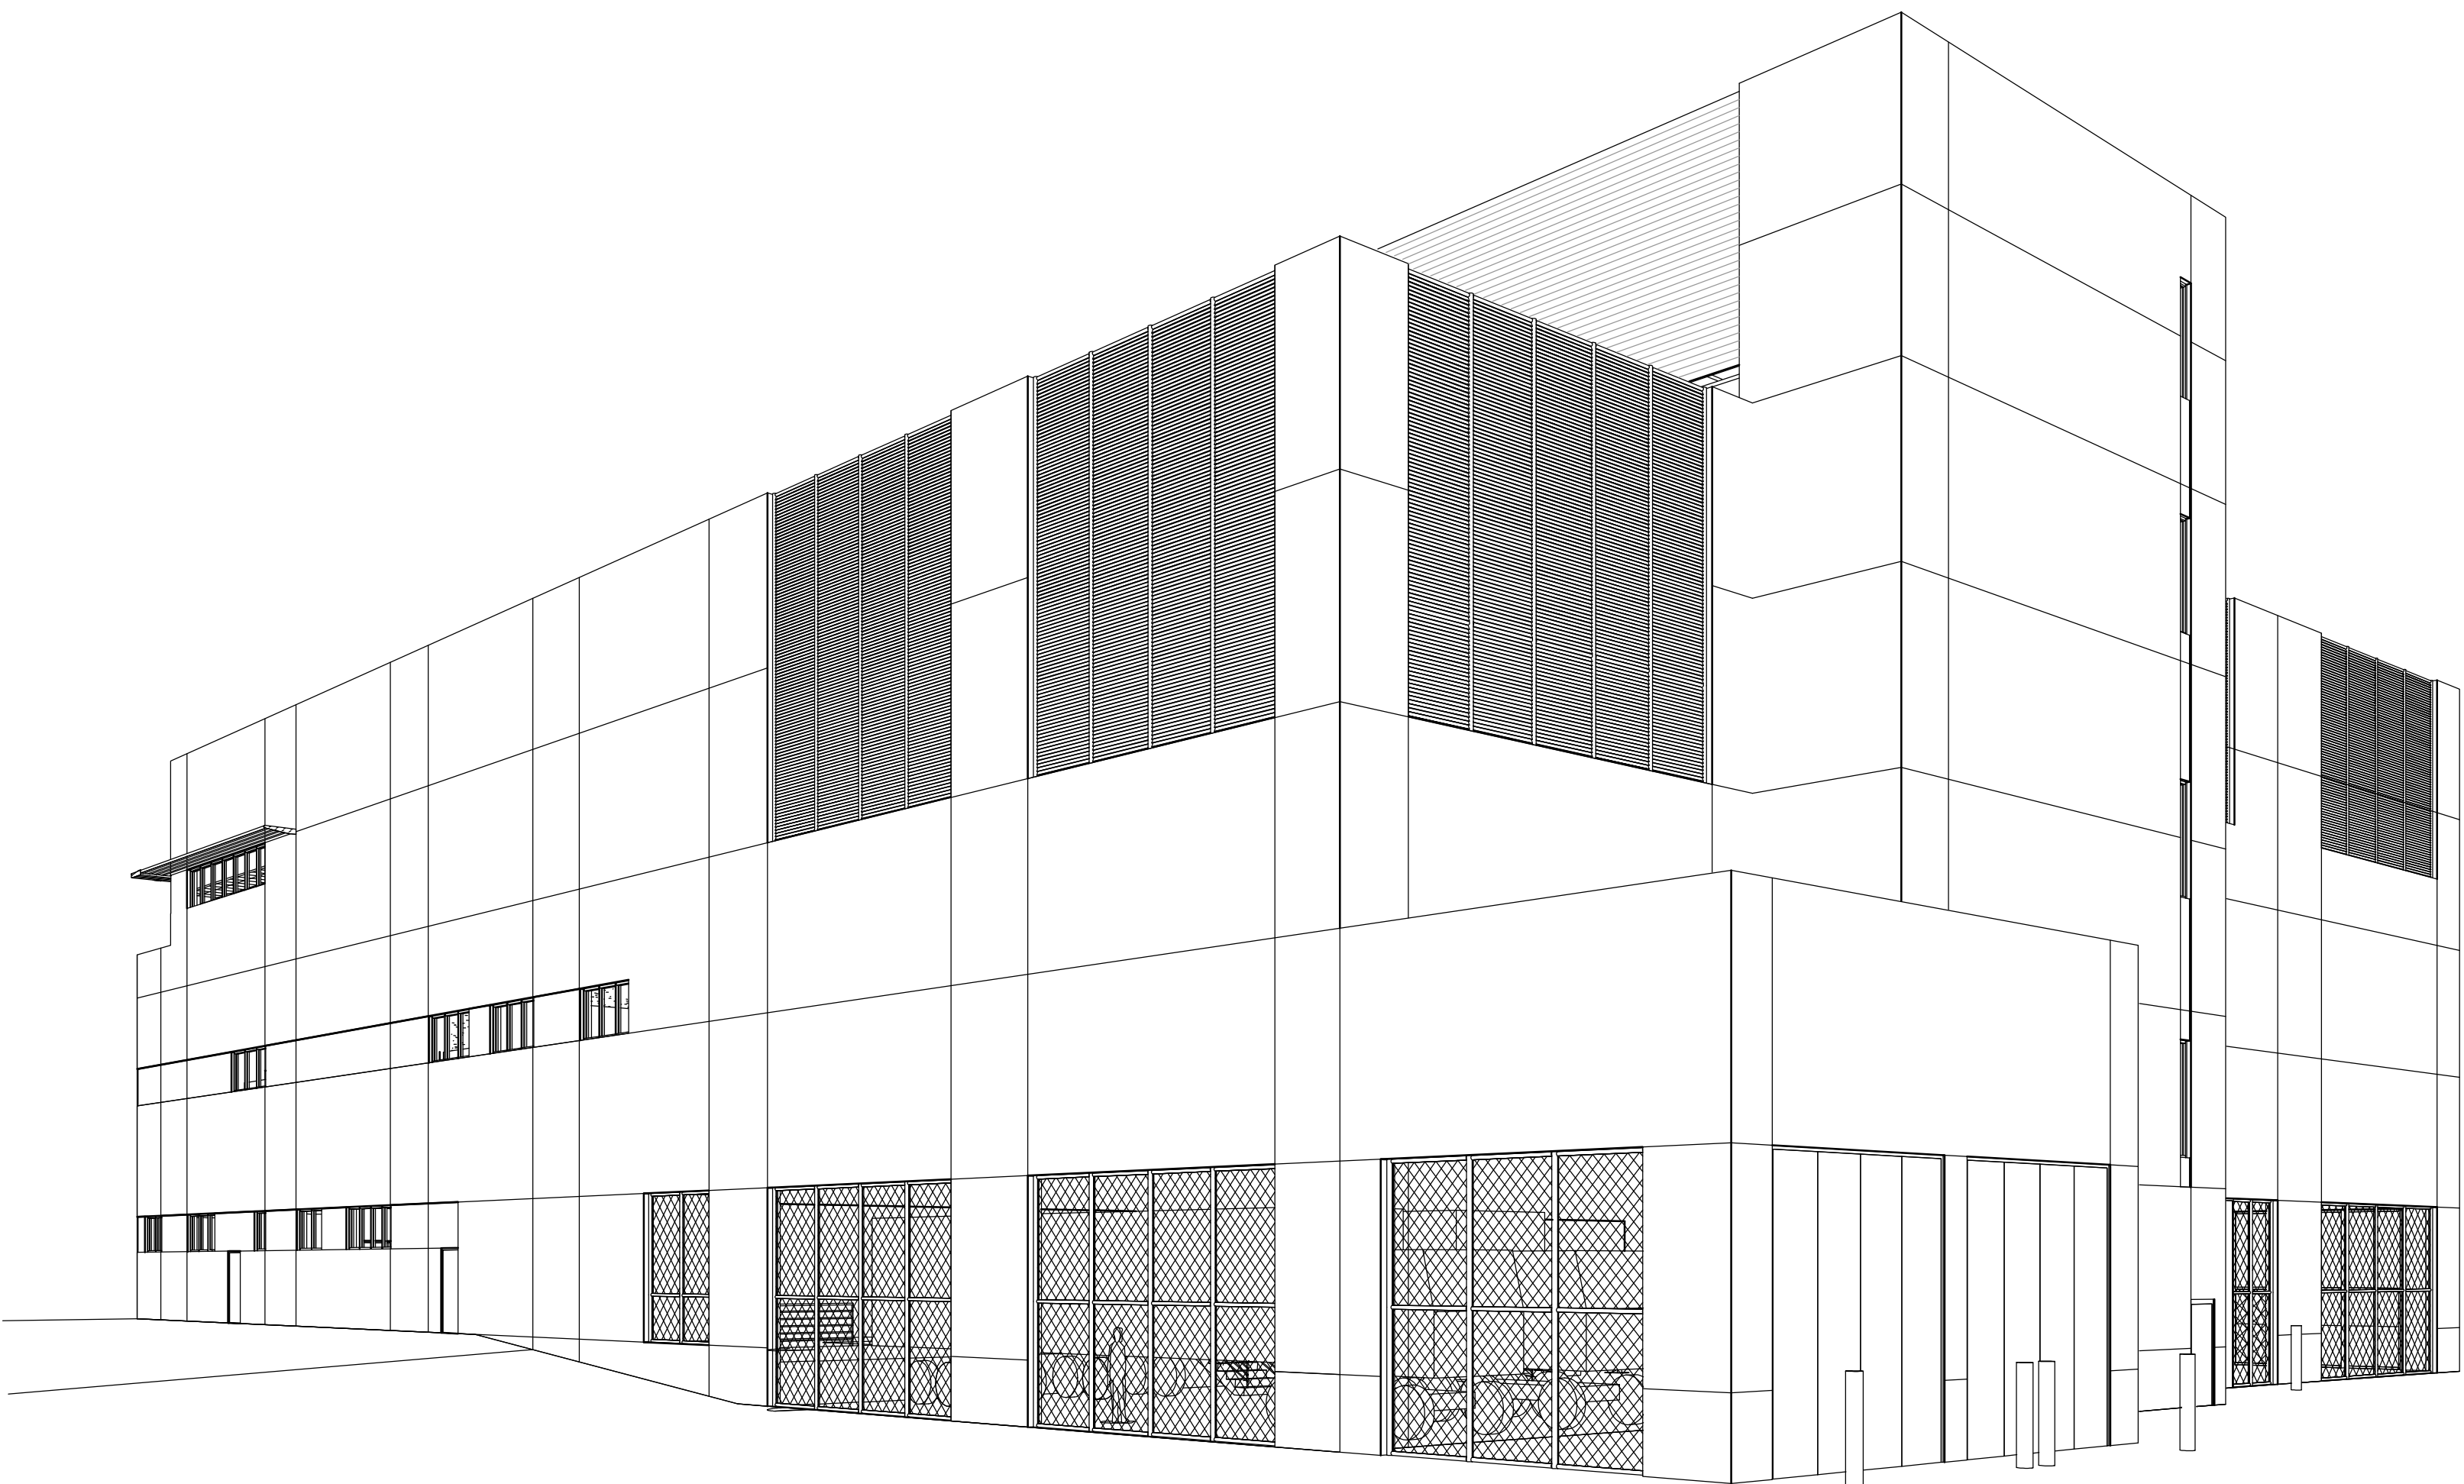


# Pinellas County Jail

## Phase I Infrastructure Criteria Package - Drawings

114400 North 49th Street  
Clearwater, FL.

3/19/2014

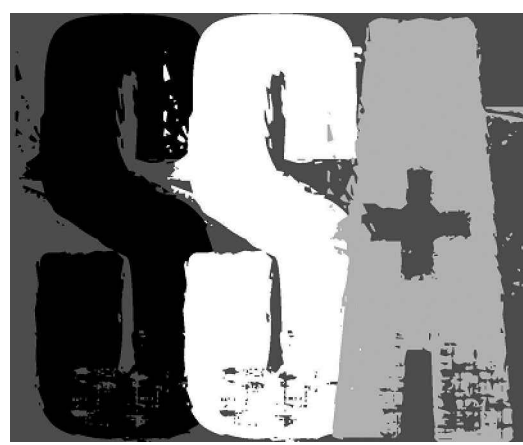

**ARCHITECTURAL**

Dewberry Architects Inc.  
  
401 SW Water St.  
Suite 701  
Peoria, IL 61602  
  
309.282.8000  
309.282.8001 fax

**ARCHITECTURAL**

ARC3 Architecture, Inc.  
  
6671 13th Avenue North  
Suite 1C  
St. Petersburg, FL 33710  
  
727.381.5220  
727.381.0052 fax

**CIVIL**

George F. Young, Inc.  
  
299 Dr. Martin Luther King Jr. St. N.  
St. Petersburg, FL 33701  
  
727.822.4317  
727.822.2919 fax

**STRUCTURAL**

TLC Engineering for Architecture  
  
500 N. Westshore Boulevard  
Suite 435  
Tampa, FL 33609  
  
813.637.0110  
813.281.8422 fax

**TECHNOLOGY**

Dewberry Architects, Inc.  
  
401 SW Water St.  
Suite 701  
Peoria, IL 61602  
  
309.282.8000  
309.282.8001 fax

**MEP**

TLC Engineering for Architecture  
  
500 N. Westshore Boulevard  
Suite 435  
Tampa, FL 33609  
  
813.637.0110  
813.637.0013 fax

**LAUNDRY/KITCHEN**

SSA  
  
5701 Park Boulevard  
Pinellas Park, FL 33781  
  
727.549.8408  
813.843.3688 fax



**F**E

## C

CSTRUCTURALARCHITECTURAL

MECHANICAL

## FIRE PROTECTION

ELECTRICALFOOD SERVICE

**Dewberry®**

401 SW Water St.  
Suite 701  
Peoria, IL 61602  
309.282.8000 Phone  
309.282.8001 Fax



114400 North 49th Street  
Clearwater, FL.

PRELIMINARY DOCUMENTS  
NOT FOR CONSTRUCTION

SCALE

[illegible]INDEX

|             |          |
|-------------|----------|
| PROJECT NO. | 50057109 |
|-------------|----------|

G-001

SHEET NO.



1. WHERE RATED CONSTRUCTION IS REQUIRED BY THE CODES, PROVIDE U.L. RATED ASSEMBLIES.
2. SEAL ALL EXISTING PENETRATIONS IN EXISTING CONSTRUCTION EXPOSED & OBSERVED DURING THE COURSE OF THE WORK.
3. SEAL ALL NEW PENETRATIONS IN EXISTING AND NEW CONSTRUCTION.
4. ALL PENETRATION SEALS IN WALLS AND HORIZONTAL ASSEMBLIES SHALL BE U.L. RATED TO MATCH THE FIRE RATING OF THE CONSTRUCTION BEING PENETRATED. PROVIDE U.L. RATED PENETRATIONS WHERE RATINGS ARE REQUIRED BY THE CODE.
5. ALL PENETRATIONS THRU NON-RATED HORIZONTAL ASSEMBLIES SEPARATING SPACES SHALL BE FIRE-BLOCKED.
6. PROTECT ALL OPENINGS IN RATED CONSTRUCTION AS REQUIRED BY THE CODES.

| <u>SYMBOL</u>                                                                       | <u>DESCRIPTION</u>                                                                                                                                                                                                                                           |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ◆ ◆ ◆ ◆ ◆                                                                           | 1 HOUR FIRE BARRIER (1 HR FB)                                                                                                                                                                                                                                |
| ● ● ● ● ●                                                                           | 2 HOUR FIRE BARRIER (2 HR FB)                                                                                                                                                                                                                                |
| ■ ■ ■ ■ ■                                                                           | 3 HOUR FIRE BARRIER (3 HR FB)                                                                                                                                                                                                                                |
|  | NUMBER OF OCCUPANTS GOING THRU AN EGRESS DOOR OR THRU AN EGRESS STAIR<br><br>MAX. NUMBER OF OCCUPANTS ALLOWED PER CODE THRU AN EGRESS DOOR OR THRU AN EGRESS STAIR<br>DOORS/CORRIDORS CALCULATED AT .2" PER OCCUPANT. STAIRS CALCULATED AT .3" PER OCCUPANT. |
| <b>ROOM NAME</b><br>465 SF<br>(24)                                                  | ROOM AREA IN SQ. FT.<br><br>NUMBER OF OCCUPANTS                                                                                                                                                                                                              |
| — — — — —                                                                           | WORST CASE DEAD END                                                                                                                                                                                                                                          |
| — — — — —                                                                           | WORST CASE COMMON PATH OF TRAVEL                                                                                                                                                                                                                             |
| — . . . — —                                                                         | WORST CASE TRAVEL DISTANCE.                                                                                                                                                                                                                                  |
| KB                                                                                  | KNOX BOX                                                                                                                                                                                                                                                     |
| FAP                                                                                 | FIRE ALARM PANEL                                                                                                                                                                                                                                             |
| FEC-1 CABINET                                                                       | SEM-RECESSED FIRE EXISTINGUISHER                                                                                                                                                                                                                             |
| FEC-2 CABINET                                                                       | SURFACE MOUNTED FIRE EXTINGUISHER                                                                                                                                                                                                                            |
| FEB                                                                                 | FIRE EXTINGUISHER & BRACKET                                                                                                                                                                                                                                  |

BUILDING CODE SYNOPSIS BASED ON:  
FLORIDA BUILDING CODE 2010 EDITION

1. MAIN OCCUPANCY CLASSIFICATION:  
INSTITUTIONAL - I-3 (SPRINKLERED)
2. CONSTRUCTION TYPE: II-A
3. BUILDING HEIGHT:  
ALLOWABLE BUILDING HEIGHT - TABLE 503:  
ALLOWABLE = 2 STORIES OR 65'-0"  
ALLOWABLE BUILDING HEIGHT W/SPRINKLER  
INCREASE - TABLE 504.2 - 1 STORIES OR 20'-0"  
TOTAL ALLOWABLE = 3 STORIES OR 85'-0"  
ACTUAL BUILDING HEIGHT = 85'-0" +/-
4. ALLOWABLE BUILDING AREA - TABLE 503:  
GROUP I:  
ALLOWABLE AREA PER FLOOR = 15,000 SF  
ALLOWABLE BLDG AREA W ALLOW. INCREASES  
(SPRINKLER & FRONTAGE) - TABLE 506.2 & TABLE 506.3 = 71,250 SF  
PER FLOOR
5. ACTUAL BUILDING AREA:  

|                       |   |            |
|-----------------------|---|------------|
| FIRST FLOOR AREA      | = | 27,504 GSF |
| SECOND FLOOR AREA     | = | 26,614 GSF |
| THIRD FLOOR AREA      | = | 18,809 GSF |
| ROOF LEVEL FLOOR AREA | = | 917 GSF    |
| TOTAL BUILDING AREA   | = | 73,844 GSF |
- OTHER BUILDING AND RENOVATION AREAS:  

|                                     |   |           |
|-------------------------------------|---|-----------|
| CONNECTOR BRIDGE                    | = | 1,012 GSF |
| CENTRAL RENOVATION AT CONNECTOR     | = | 519 GSF   |
| SOUTH RENOVATION AT ELEVATOR FIRST  | = | 341 GSF   |
| SOUTH RENOVATION AT ELEVATOR SECOND | = | 274 GSF   |
6. FIRE RESISTANCE RATINGS - TABLE 601: IA  

|                                |   |  |
|--------------------------------|---|--|
| PRIMARY STRUCTURAL FRAME       |   |  |
| BEARING WALLS                  |   |  |
| EXTERIOR                       | 1 |  |
| INTERIOR                       | 1 |  |
| NON-BEARING WALLS & PARTITIONS |   |  |
| EXTERIOR (TABLE 602)           |   |  |
| X<5                            | 1 |  |
| 5<X<10                         | 1 |  |
| 10<X<30                        | 1 |  |
| X<30                           | 1 |  |
| INTERIOR                       | 0 |  |
| FLOOR CONSTRUCTION             | 1 |  |
| AND SECONDARY MEMBERS          |   |  |
7. OCCUPANCY SEPERATION (508.4):  
NONE REQUIRED.
8. OCCUPANT LOAD: 895 TOTAL OCCUPANTS  
REFER TO DRAWINGS
9. CAPACITY OF EXITS (ACTUAL/ALLOWABLE):  
(TABLE 1005.1) REFER TO DRAWINGS
10. LENGTH OF EXIT ACCESS TRAVEL (SECTION 1015 AND TABLE 1015)  
ALLOWABLE = 20' ALONG SPRINKLERS  
ACTUAL WORST CASE = 180'-4"
11. DEAD END CORRIDORS (SECTION 1017.3):  
ALLOWABLE = 50'-0" W/ SPRINKLERS  
ACTUAL WORST CASE = 28'-0"
12. COMMON PATH OF TRAVEL (SECTION 1014.3):  
ALLOWABLE = 100'-0"  
ACTUAL WORST CASE = 78'-8"
13. FIRE ALARMS & DETECTION SYSTEM:  
ALARMS AND FIRE PROTECTION SIGNALING SYSTEM  
PROVIDED PER IBC 907.0 AND NFPA 72
14. FIRE PROTECTION SYSTEMS:  
AUTOMATIC SPRINKLER SYSTEM WITH SUPERVISION IN ACCORDANCE  
WITH IBC 903.0
15. INCIDENTAL ACCESSORY OCCUPANCIES:  
NONE

Scale:  $\frac{3}{32}'' = 1'-0''$




1. WHERE RATED CONSTRUCTION IS REQUIRED BY THE CODES, PROVIDE U.L. RATED ASSEMBLIES.
2. SEAL ALL EXISTING PENETRATIONS IN EXISTING CONSTRUCTION EXPOSED & OBSERVED DURING THE COURSE OF THE WORK.
3. SEAL ALL NEW PENETRATIONS IN EXISTING AND NEW CONSTRUCTION.
4. ALL PENETRATION SEALS IN WALLS AND HORIZONTAL ASSEMBLIES SHALL BE RATED TO MATCH THE FIRE RATING OF THE CONSTRUCTION BEING PENETRATED. PROVIDE U.L. RATED PENETRATIONS WHERE RATINGS ARE REQUIRED BY THE CODE.
5. ALL PENETRATIONS THRU NON-RATED HORIZONTAL ASSEMBLIES SEPARATING SPACES SHALL BE FIRE-BLOCKED.
6. PROTECT ALL OPENINGS IN RATED CONSTRUCTION AS REQUIRED BY THE CODES.

|                  |                                   |
|------------------|-----------------------------------|
| KB               | KNOX BOX                          |
| FAP              | FIRE ALARM PANEL                  |
| FEC-1<br>CABINET | SEMI-RECESSED FIRE EXTINGUISHER   |
| FEC-2<br>CABINET | SURFACE MOUNTED FIRE EXTINGUISHER |
| FEB              | FIRE EXTINGUISHER & BRACKET       |

15. INCIDENTAL ACCESSORY OCCUPANCIES:  
NONE





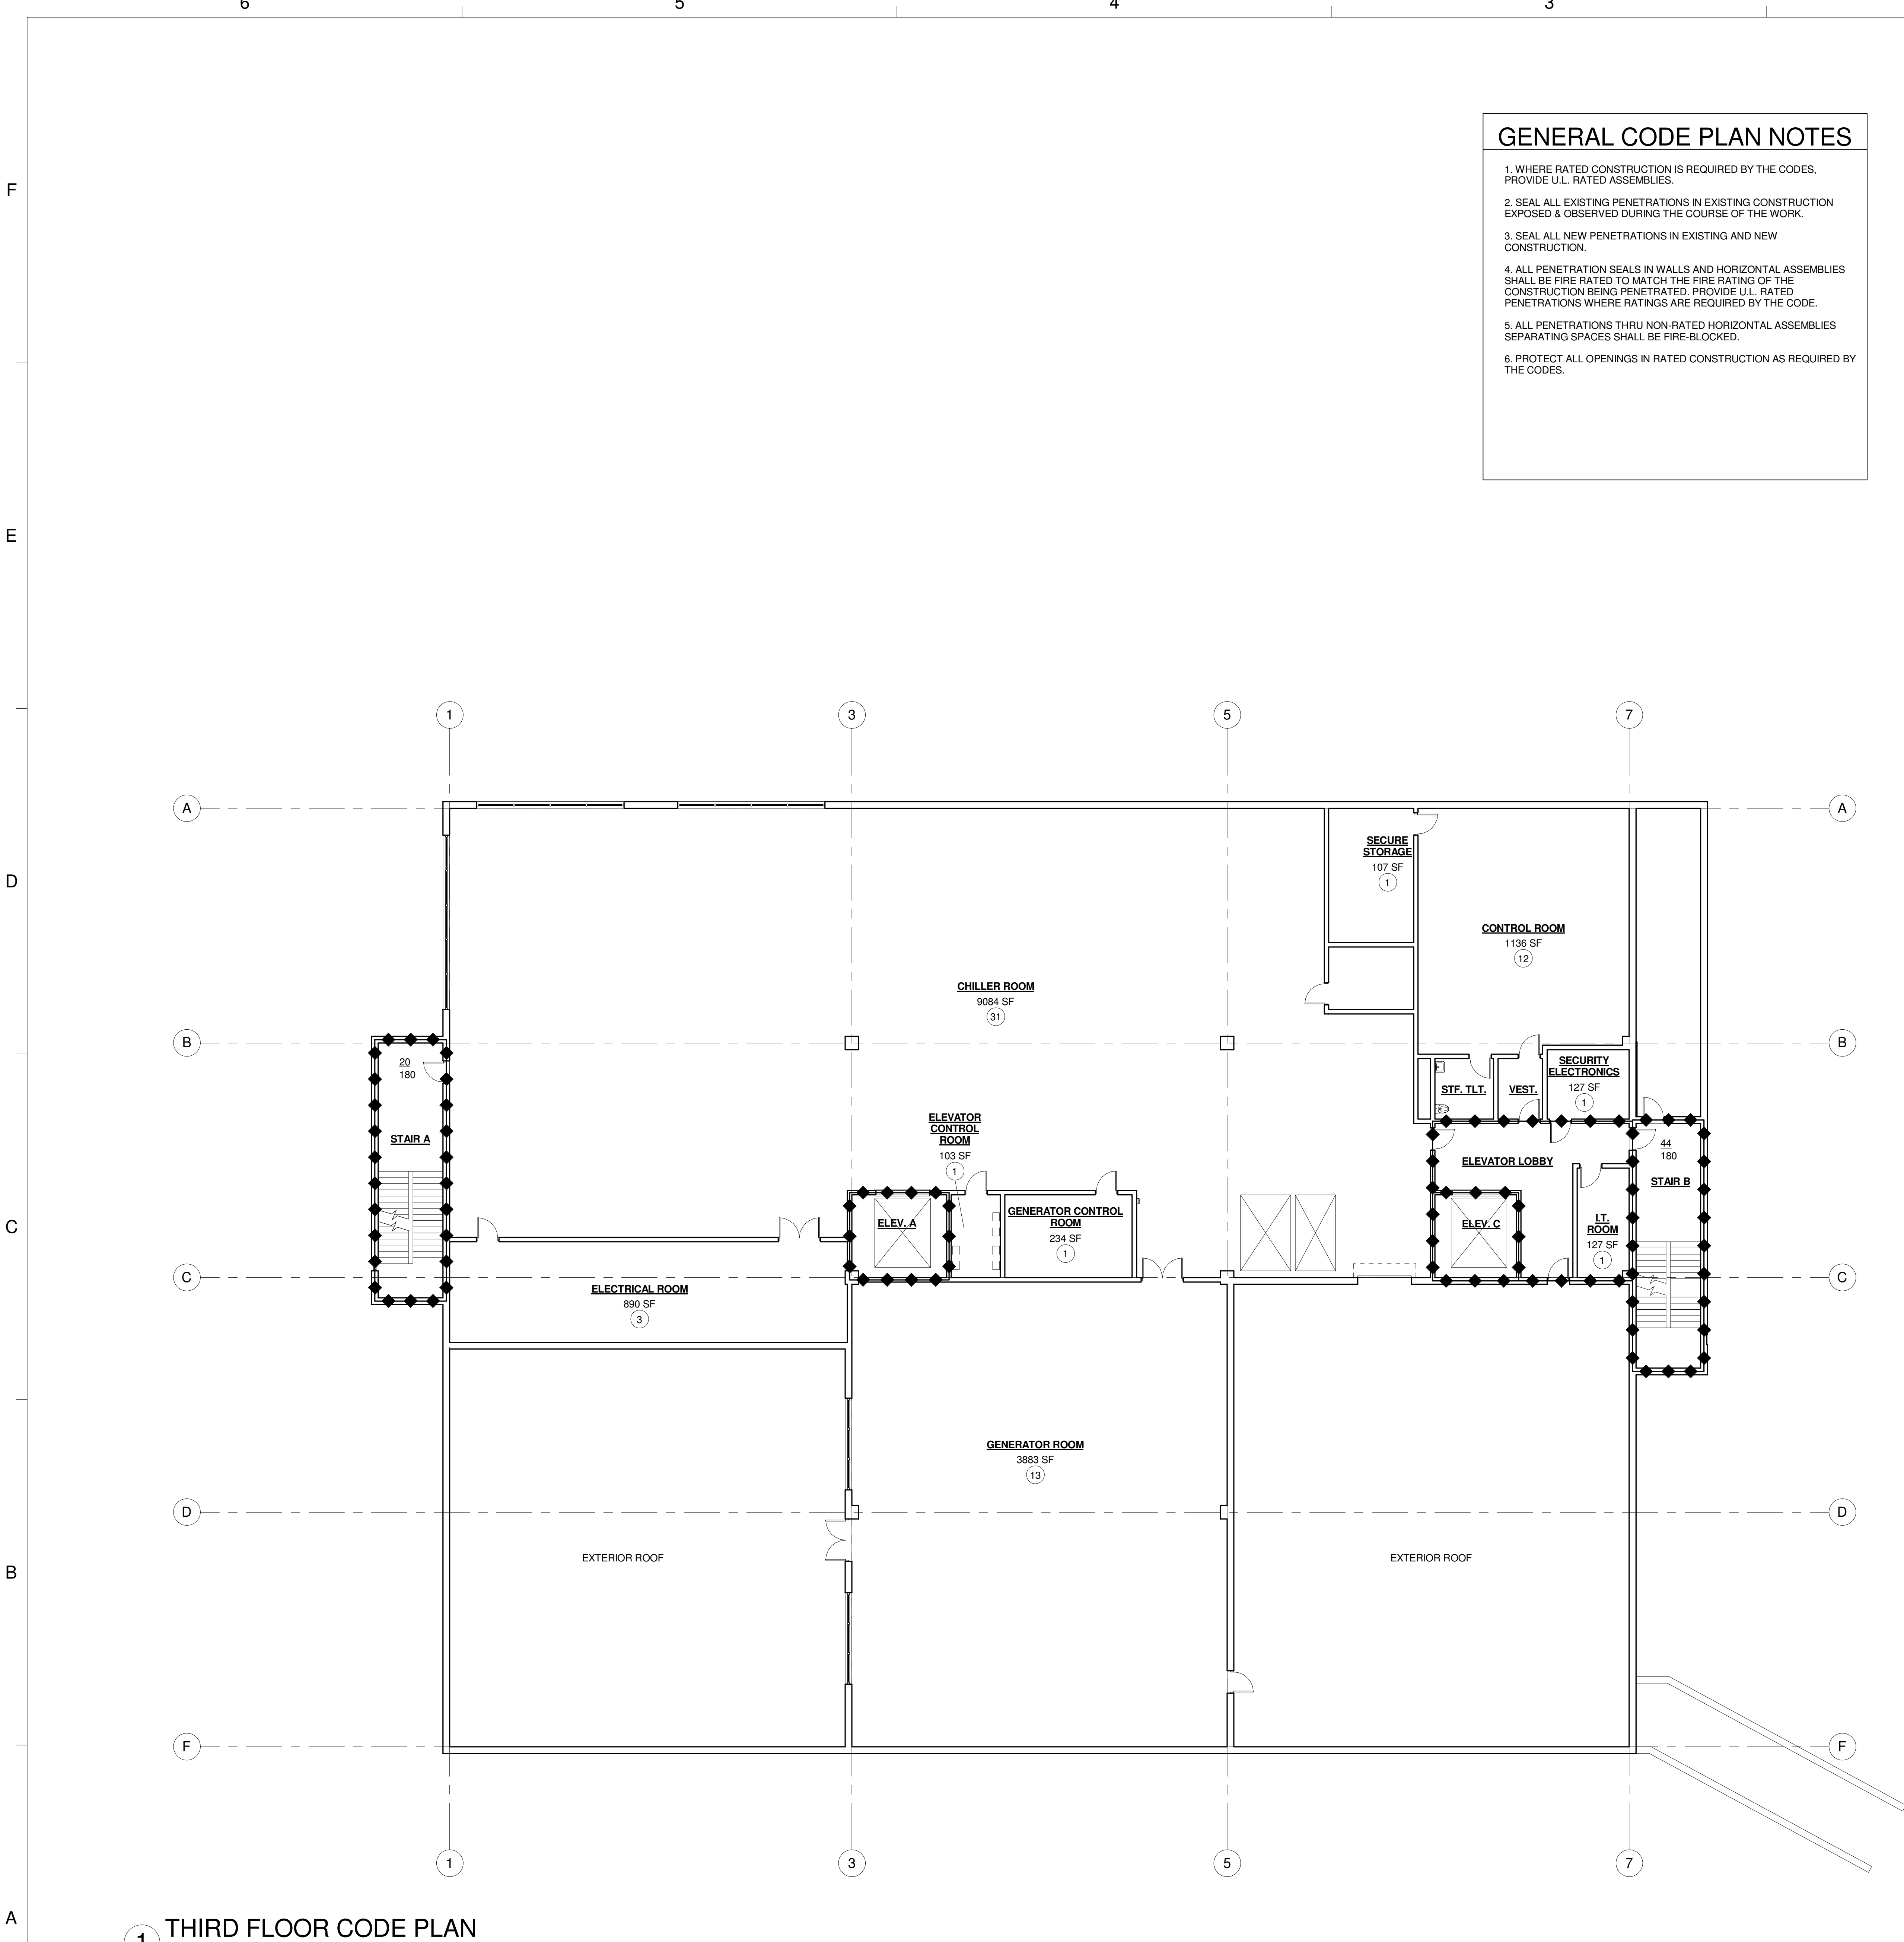

**GENERAL CODE PLAN NOTES**

1. WHERE RATED CONSTRUCTION IS REQUIRED BY THE CODES, PROVIDE U.L. RATED ASSEMBLIES.

2. SEAL ALL EXISTING PENETRATIONS IN EXISTING CONSTRUCTION EXPOSED & OBSERVED DURING THE COURSE OF THE WORK.

3. SEAL ALL NEW PENETRATIONS IN EXISTING AND NEW CONSTRUCTION.

4. ALL PENETRATION SEALS IN WALLS AND HORIZONTAL ASSEMBLIES SHALL BE FIRE RATED TO MATCH THE FIRE RATING OF THE CONSTRUCTION BEING PENETRATED. PROVIDE U.L. RATED PENETRATIONS WHERE RATINGS ARE REQUIRED BY THE CODE.

5. ALL PENETRATIONS THRU NON-RATED HORIZONTAL ASSEMBLIES SEPARATING SPACES SHALL BE FIRE BLOCKED.

6. PROTECT ALL OPENINGS IN RATED CONSTRUCTION AS REQUIRED BY THE CODES.

| CODE PLAN SYMBOL LEGEND |                                                                                                                                                                              |
|-------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| SYMBOL                  | DESCRIPTION                                                                                                                                                                  |
| ◆◆◆◆                    | 1 HOUR FIRE BARRIER (1 HR FB)                                                                                                                                                |
| ●●●●                    | 2 HOUR FIRE BARRIER (2 HR FB)                                                                                                                                                |
| ■ ■ ■ ■                 | 3 HOUR FIRE BARRIER (3 HR FB)                                                                                                                                                |
|                         | NUMBER OF OCCUPANTS GOING THRU AN EGRESS DOOR OR THRU AN EGRESS STAIR                                                                                                        |
|                         | MAX. NUMBER OF OCCUPANTS ALLOWED PER CODE THRU AN EGRESS DOOR OR THRU AN EGRESS STAIR DOORS/CORRIDORS CALCULATED AT .2' PER OCCUPANT. STAIRS CALCULATED AT .3' PER OCCUPANT. |
|                         | ROOM NAME<br>ROOM AREA IN SQ. FT.<br>NUMBER OF OCCUPANTS                                                                                                                     |
| ----                    | WORST CASE DEAD END                                                                                                                                                          |
| — • —                   | WORST CASE COMMON PATH OF TRAVEL                                                                                                                                             |
| — • • —                 | WORST CASE TRAVEL DISTANCE                                                                                                                                                   |
| KB                      | KNOX BOX                                                                                                                                                                     |
| FAP                     | FIRE ALARM PANEL                                                                                                                                                             |
| FEC-1 CABINET           | SEMI-RECESSED FIRE EXISTINGUISHER                                                                                                                                            |
| FEC-2 CABINET           | SURFACE MOUNTED FIRE EXTINGUISHER                                                                                                                                            |
| FEB                     | FIRE EXTINGUISHER & BRACKET                                                                                                                                                  |

# BUILDING CODE SYNOPSIS

BUILDING CODE SYNOPSIS BASED ON:  
FLORIDA BUILDING CODE 2010 EDITION

1. MAIN OCCUPANCY CLASSIFICATION:  
INSTITUTIONAL - I-3 (SPRINKLERED)
2. CONSTRUCTION TYPE: II-A
3. BUILDING HEIGHT:  
ALLOWABLE BUILDING HEIGHT - TABLE 503:  
ALLOWABLE = 2 STORIES OR 65'-0"  
ALLOWABLE BUILDING HEIGHT W/SPRINKLER INCREASE - TABLE 504.2 = 1 STORIES OR 20'-0"  
TOTAL ALLOWABLE = 3 STORIES OR 85'-0"  
ACTUAL BUILDING HEIGHT = 85'-0" +/-
4. ALLOWABLE BUILDING AREA - TABLE 503:  
GROUP I:  
ALLOWABLE AREA PER FLOOR = 15,000 SF  
ALLOWABLE BLDG AREA W/ ALLOW. INCREASES (SPRINKLER & FRONTAGE) - TABLE 506.2 & TABLE 506.3 = 71,250 SF PER FLR
5. ACTUAL BUILDING AREA:  

|                       |   |            |
|-----------------------|---|------------|
| FIRST FLOOR AREA      | = | 27,504 GSF |
| SECOND FLOOR AREA     | = | 26,614 GSF |
| THIRD FLOOR AREA      | = | 18,808 GSF |
| ROOF LEVEL FLOOR AREA | = | 917 GSF    |
| TOTAL BUILDING AREA   | = | 73,844 GSF |

  
OTHER BUILDING AND RENOVATION AREAS:  

|                                     |   |           |
|-------------------------------------|---|-----------|
| CONNECTOR BRIDGE                    | = | 1,012 GSF |
| CENTRAL RENOVATION AT CONNECTOR     | = | 519 GSF   |
| SOUTH RENOVATION AT ELEVATOR FIRST  | = | 341 GSF   |
| SOUTH RENOVATION AT ELEVATOR SECOND | = | 274 GSF   |
6. FIRE RESISTANCE RATINGS - TABLE 601: IIIA  
PRIMARY STRUCTURAL FRAME  
BEARING WALLS  
EXTERIOR  
INTERIOR  
NON-BEARING WALLS & PARTITIONS  
EXTERIOR (TABLE 602)  
X<5  
5<X<10  
10<X<30  
X<30  
INTERIOR  
FLOOR CONSTRUCTION  
AND SECONDARY MEMBERS  

|   |
|---|
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |
| 1 |

SEAL

PRELIMINARY DOCUMENTS  
NOT FOR CONSTRUCTION

KEY PLAN

SCALE

As indicated

| No.         | Description | Date |
|-------------|-------------|------|
| REVISIONS   |             |      |
| DRAWN BY    | MDR         |      |
| APPROVED BY | LWB         |      |
| CHECKED BY  | CRD         |      |
| DATE        | 03/19/2014  |      |



1. WHERE RATED CONSTRUCTION IS REQUIRED BY THE CODES, PROVIDE U.L. RATED ASSEMBLIES.
2. SEAL ALL EXISTING PENETRATIONS IN EXISTING CONSTRUCTION EXPOSED & OBSERVED DURING THE COURSE OF THE WORK.
3. SEAL ALL NEW PENETRATIONS IN EXISTING AND NEW CONSTRUCTION.
4. ALL PENETRATION SEALS IN WALLS AND HORIZONTAL ASSEMBLIES SHALL BE FIRE RATED TO MATCH THE FIRE RATING OF THE CONSTRUCTION BEING PENETRATED. PROVIDE U.L. RATED PENETRATIONS WHERE RATINGS ARE REQUIRED BY THE CODE.
5. ALL PENETRATIONS THRU NON-RATED HORIZONTAL ASSEMBLIES SEPARATING SPACES SHALL BE FIRE-BLOCKED.
6. PROTECT ALL OPENINGS IN RATED CONSTRUCTION AS REQUIRED BY THE CODES.

| SYMBOL                                                                              | DESCRIPTION                                                                                                                                                                                                                                                    |
|-------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| ◆ ◆ ◆ ◆ ◆                                                                           | 1 HOUR FIRE BARRIER (1 HR FB)                                                                                                                                                                                                                                  |
| ● ● ● ● ●                                                                           | 2 HOUR FIRE BARRIER (2 HR FB)                                                                                                                                                                                                                                  |
| ■ ■ ■ ■ ■                                                                           | 3 HOUR FIRE BARRIER (3 HR FB)                                                                                                                                                                                                                                  |
|  | NUMBER OF OCCUPANTS GOING THRU AN EGRESS DOOR OR THRU AN EGRESS STAIR<br><br>MAX. NUMBER OF OCCUPANTS ALLOWED PER CODE THRU AN EGRESS DOOR OR THRU AN EGRESS STAIR<br><br>DOORS/CORRIDORS CALCULATED AT 2" PER OCCUPANT. STAIRS CALCULATED AT 3" PER OCCUPANT. |
| <b>ROOM NAME</b><br>465 SF<br>(24)                                                  | ROOM AREA IN SQ. FT.<br><br>NUMBER OF OCCUPANTS                                                                                                                                                                                                                |

|    |                                                                                                                                                                                                                                                                        |              |
|----|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|
| 1. | MAIN OCCUPANCY CLASSIFICATION:<br>INSTITUTIONAL - I-3 (SPRINKLERED)                                                                                                                                                                                                    |              |
| 2. | CONSTRUCTION TYPE: II-A                                                                                                                                                                                                                                                |              |
| 3. | BUILDING HEIGHT:<br>ALLOWABLE BUILDING HEIGHT - TABLE 503:<br>ALLOWABLE = 2 STORIES OR 65'-0"<br>ALLOWABLE BUILDING HEIGHT W/SPRINKLER<br>INCREASE - TABLE 504.2 = 1 STORIES OR 20'-0"<br>TOTAL ALLOWABLE = 3 STORIES OR 85'-0"<br>ACTUAL BUILDING HEIGHT = 85'-0" +/- |              |
| 4. | ALLOWABLE BUILDING AREA - TABLE 503:<br>GROUP I<br>ALLOWABLE AREA PER FLOOR = 15,000 SF<br>ALLOWABLE BLDG AREA W/ ALLOW. INCREASES<br>(SPRINKLER & FRONTAGE) - TABLE 506.2 & TABLE 506.3 = 71,250 SF<br>PER FLR.                                                       |              |
| 5. | ACTUAL BUILDING AREA:                                                                                                                                                                                                                                                  |              |
|    | FIRST FLOOR AREA                                                                                                                                                                                                                                                       | = 27,504 GSF |
|    | SECOND FLOOR AREA                                                                                                                                                                                                                                                      | = 26,614 GSF |
|    | THIRD FLOOR AREA                                                                                                                                                                                                                                                       | = 18,809 GSF |
|    | ROOF LEVEL FLOOR AREA                                                                                                                                                                                                                                                  | = 1,332 GSF  |
|    | TOTAL BUILDING AREA                                                                                                                                                                                                                                                    | = 73,844 GSF |
|    | OTHER BUILDING AND RENOVATION AREAS:                                                                                                                                                                                                                                   |              |
|    | CONNECTOR BRIDGE                                                                                                                                                                                                                                                       | = 1,012 GSF  |
|    | CENTRAL RENOVATION AT CONNECTOR                                                                                                                                                                                                                                        | = 519 GSF    |
|    | SOUTH RENOVATION AT ELEVATOR FIRST                                                                                                                                                                                                                                     | = 341 GSF    |
|    | SOUTH RENOVATION AT ELEVATOR SECOND                                                                                                                                                                                                                                    | = 274 GSF    |

|                                |   |
|--------------------------------|---|
| PRIMARY STRUCTURAL FRAME       | 1 |
| BEARING WALLS                  | 1 |
| EXTERIOR                       | 1 |
| INTERIOR                       | 1 |
| NON-BEARING WALLS & PARTITIONS |   |
| EXTERIOR (TABLE 602)           |   |
| X<5                            | 1 |
| 5<X<10                         | 1 |
| 10<X<30                        | 1 |
| X>30                           | 1 |
| INTERIOR                       | 0 |
| FLOOR CONSTRUCTION             | 1 |
| AND SECONDARY MEMBERS          |   |

8. OCCUPANT LOAD: 895 TOTAL OCCUPANTS  
REFER TO DRAWINGS

10. LENGTH OF EXIT ACCESS TRAVEL (SECTION 1015 AND TABLE 1015. ALLOWABLE = 200' W/ SPRINKLERS)

12. COMMON PATH OF TRAVEL (SECTION 1014.3):  
ALLOWABLE = 100'-0"  
ACTUAL WORST CASE = 70'-0"

14. FIRE PROTECTION SYSTEMS:  
AUTOMATIC SPRINKLER SYSTEM WITH SUPERVISION IN ACCORDANCE  
WITH IBC 903.0

NONE

Scale:  $1/8" = 1'-0"$

Scale: 1/8" = 1'-0"

3 Scale: 1/8" = 1'-0'




- 1) A TEMPORARY SECURE PERIMETER SHALL BE MAINTAINED AT ALL TIMES IN ORDER TO SEPARATE THE DEMOLITION AND CONSTRUCTION ACTIVITIES FROM THE INMATE POPULATION.
- 2) ACCESS AND SERVICES TO EXISTING FACILITIES TO REMAIN SHALL BE MAINTAINED TO ENSURE ACCESS.
- 3) INTERRUPTIONS TO EXISTING ACCESS OR OPERATIONS SHALL BE LIMITED AND COORDINATED WITH THE FACILITY IN ADVANCE OF THE INTERRUPTION.
- 4) COORDINATE SELECTIVE DEMOLITION AND/OR RENOVATION OF ANCILLARY STRUCTURES REQUIRED TO PHASE CONSTRUCTION.
- 5) REFER TO CIVIL DRAWINGS FOR SITE DEVELOPMENT CRITERIA AND INFORMATION RELATED TO ADDITIONAL SUB PHASING.

- 1 DEMOLITION OF FSC BUILDING AND RELATED FENCING, SITE IMPROVEMENTS AND UTILITES TO PREPARE SITE FOR NEW CONSTRUCTION.
- 2 DEMOLITION OF SITE FENCING, REFER TO CIVIL CRITERIA DRAWINGS

 EXISTING BUILDING

 EXISTING SECURE PERIMETER FENCE

 EXISTING SITE PERIMETER FENCE

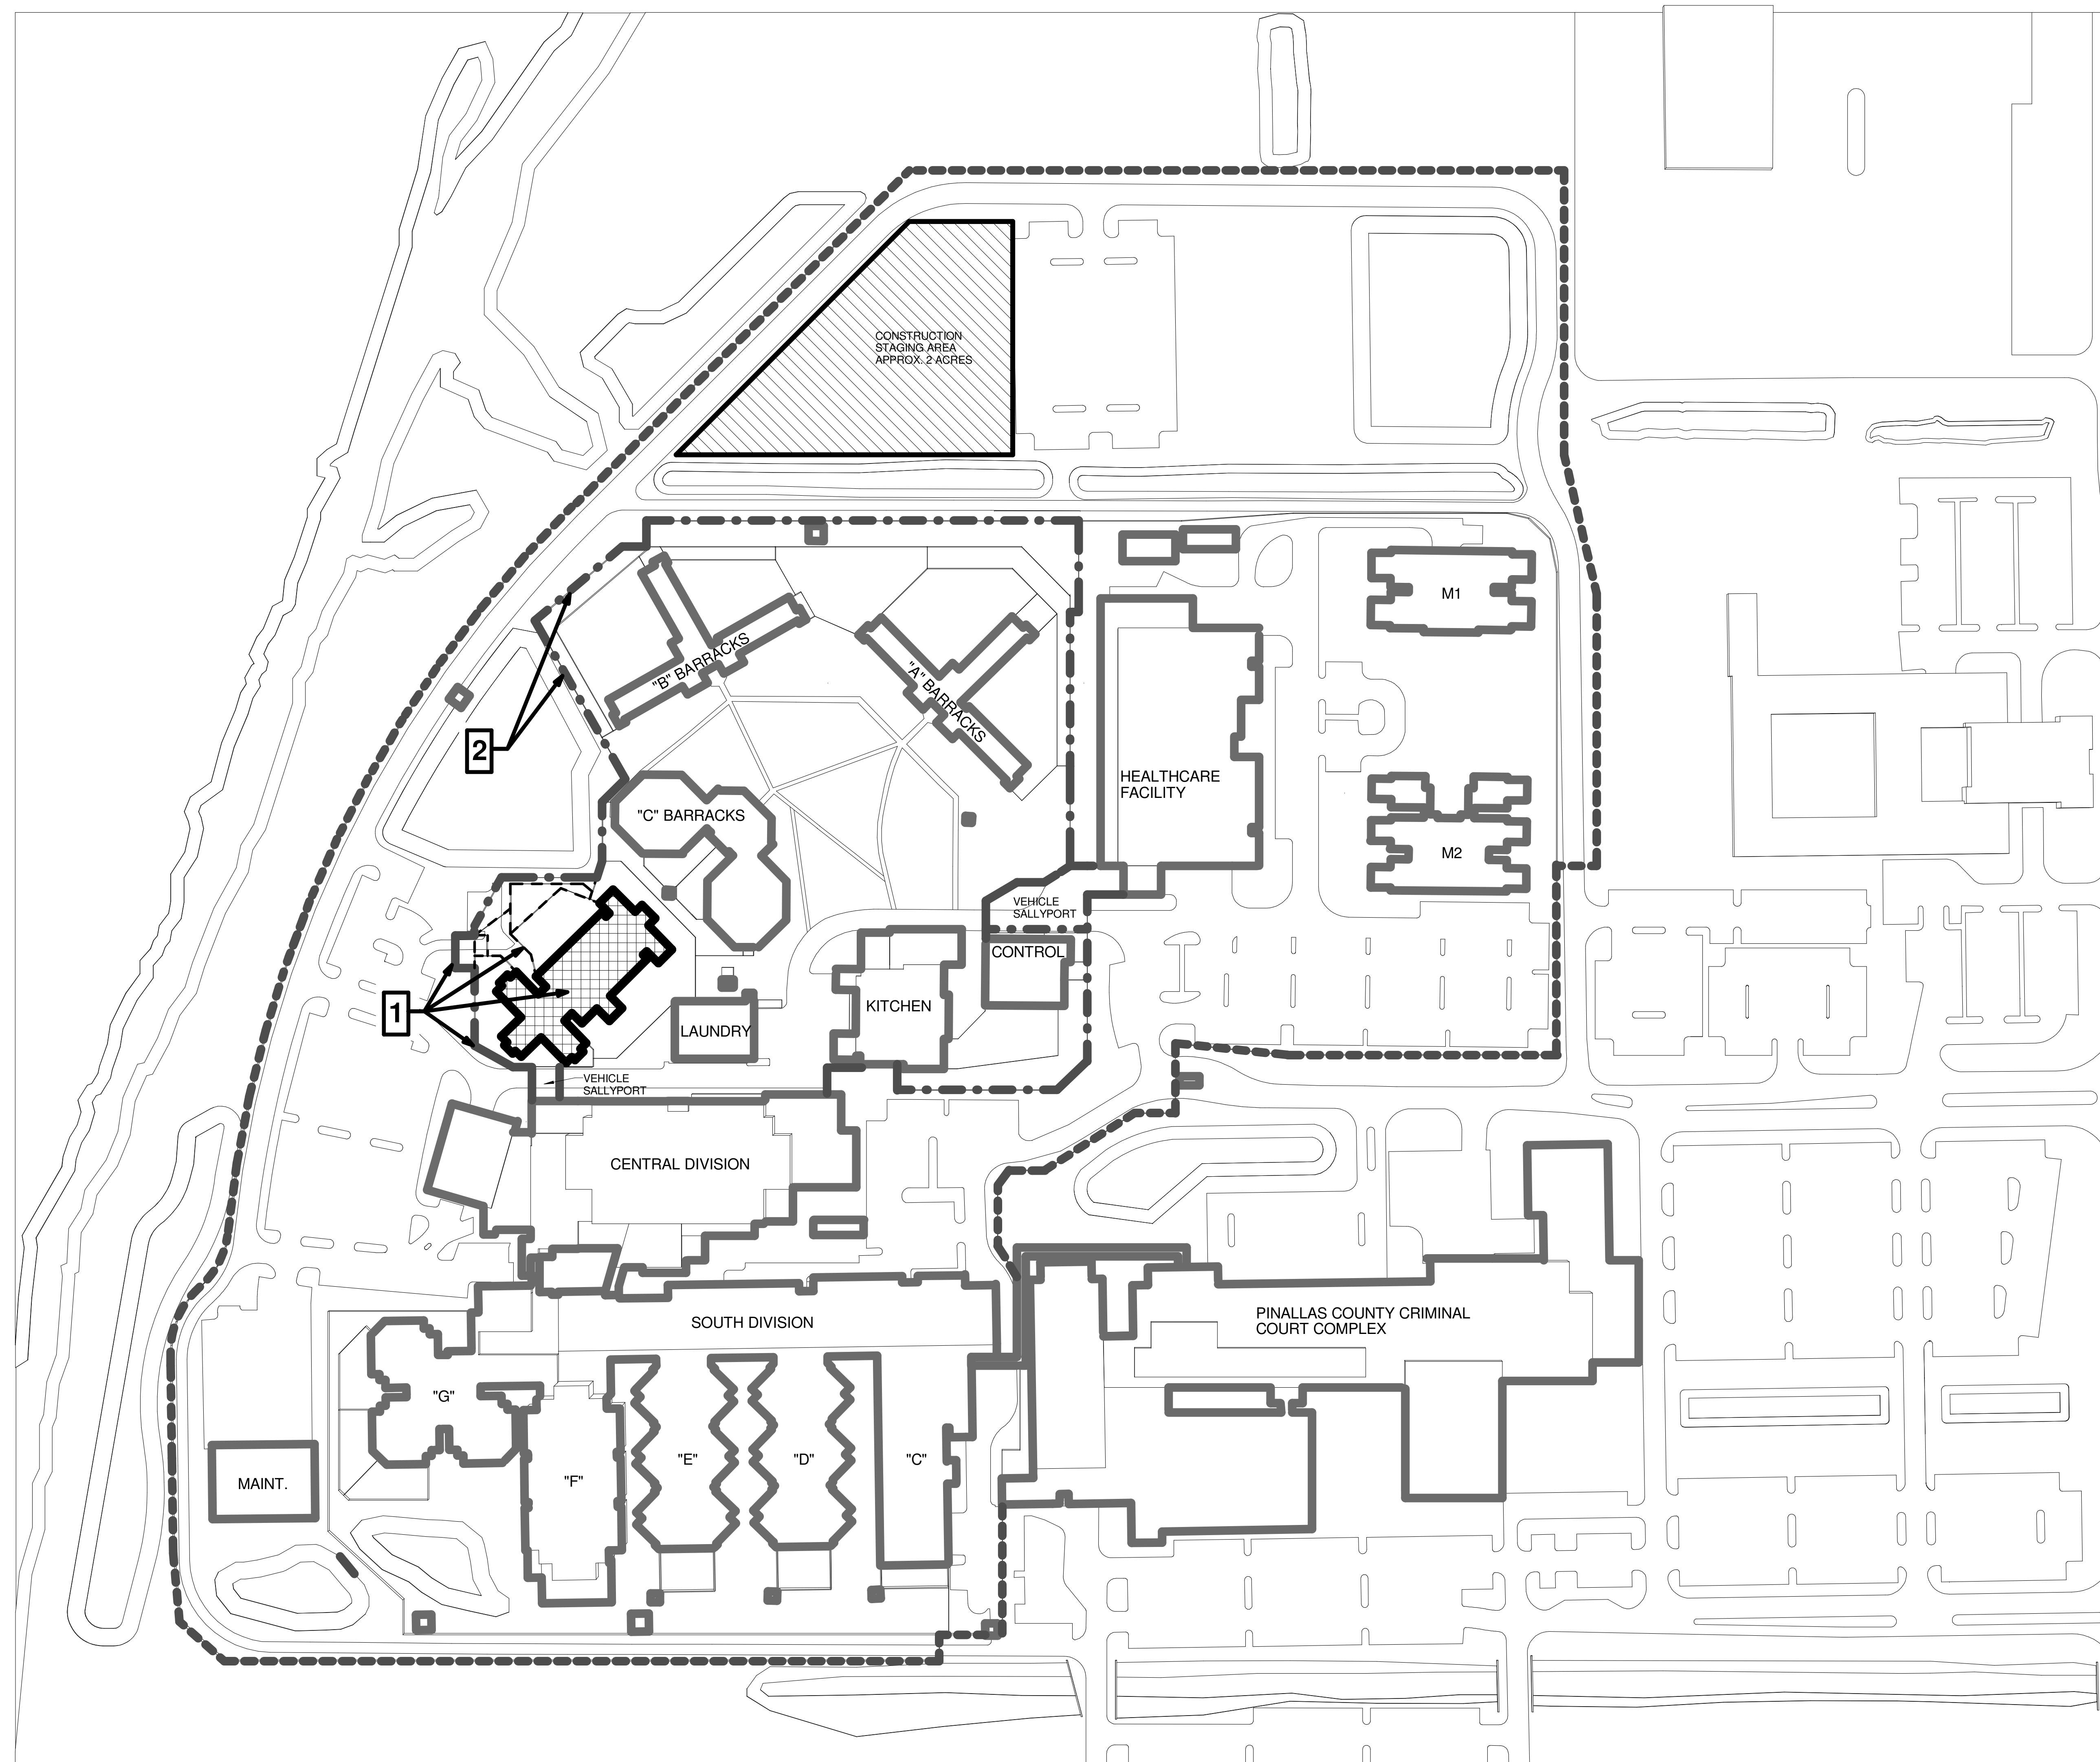

**1** EXISTING SITE PLAN  
Scale: 1" = 100'-0"

Pinellas County  
Upgrade Jail Campus Infrastructure  
Phase 1 Design Criteria  
114400 North 49th Street  
Clearwater, FL

SEAL

PRELIMINARY DOCUMENTS  
NOT FOR CONSTRUCTION

## KEY PLAN

SCALE

$$1'' = 100'-0''$$
[illegible]

## REVISIONS

|             |            |
|-------------|------------|
| DRAWN BY    | MDR        |
| APPROVED BY | LWB        |
| CHECKED BY  | CRD        |
| DATE        | 03/19/2014 |

TITLE

# CONCEPTUAL CONSTRUCTION PHASING PLAN - PHASE 1

|             |          |
|-------------|----------|
| PROJECT NO. | 50057109 |
|-------------|----------|

G-200

SHEET NO.



Pinellas County  
Upgrade Jail Campus Infrastructure  
Phase 1 Design Criteria  
114400 North 49th Street  
Clearwater, FL

SEAL

PRELIMINARY DOCUMENTS  
NOT FOR CONSTRUCTION

## KEY PLAN

SCALE

As indicated

[illegible]

## REVISIONS

|             |            |
|-------------|------------|
| DRAWN BY    | MDR        |
| APPROVED BY | LWB        |
| CHECKED BY  | CRD        |
| DATE        | 03/19/2014 |

| TITLE |
|-------|
|-------|

# CONCEPTUAL CONSTRUCTION PHASING PLAN - PHASE 2

|             |          |
|-------------|----------|
| PROJECT NO. | 50057109 |
|-------------|----------|

G-201

SHEET NO.

- 1) A TEMPORARY SECURE PERIMETER SHALL BE MAINTAINED AT ALL TIMES IN ORDER TO SEPARATE THE DEMOLITION AND CONSTRUCTION ACTIVITIES FROM THE INNATE POPULATION.
- 2) ACCESS AND SERVICES TO EXISTING FACILITIES TO REMAIN SHALL BE MAINTAINED TO THE MAXIMUM EXTENT POSSIBLE.
- 3) INTERRUPTIONS TO EXISTING ACCESS OR OPERATIONS SHALL BE LIMITED AND COORDINATED WITH THE FACILITY IN ADVANCE OF THE INTERRUPTION.
- 4) COORDINATE SELECTIVE DEMOLITION AND/OR RENOVATION OF ANCILLARY STRUCTURES REQUIRED TO PHASE CONSTRUCTION.
- 5) REFER TO CIVIL DRAWINGS FOR SITE DEVELOPMENT CRITERIA AND INFORMATION RELATED TO ADDITIONAL SUB PHASING.


|          |                                                     |
|----------|-----------------------------------------------------|
| <b>1</b> | CONSTRUCTION OF INFRASTRUCTURE BUILDING AND FENCING |
| <b>2</b> | CONSTRUCTION OF FREIGHT ELEVATOR ADDITION           |




EXISTING BUILDING

EXISTING SECURE PERIMETER FENCE

EXISTING SITE PERIMETER FENCE

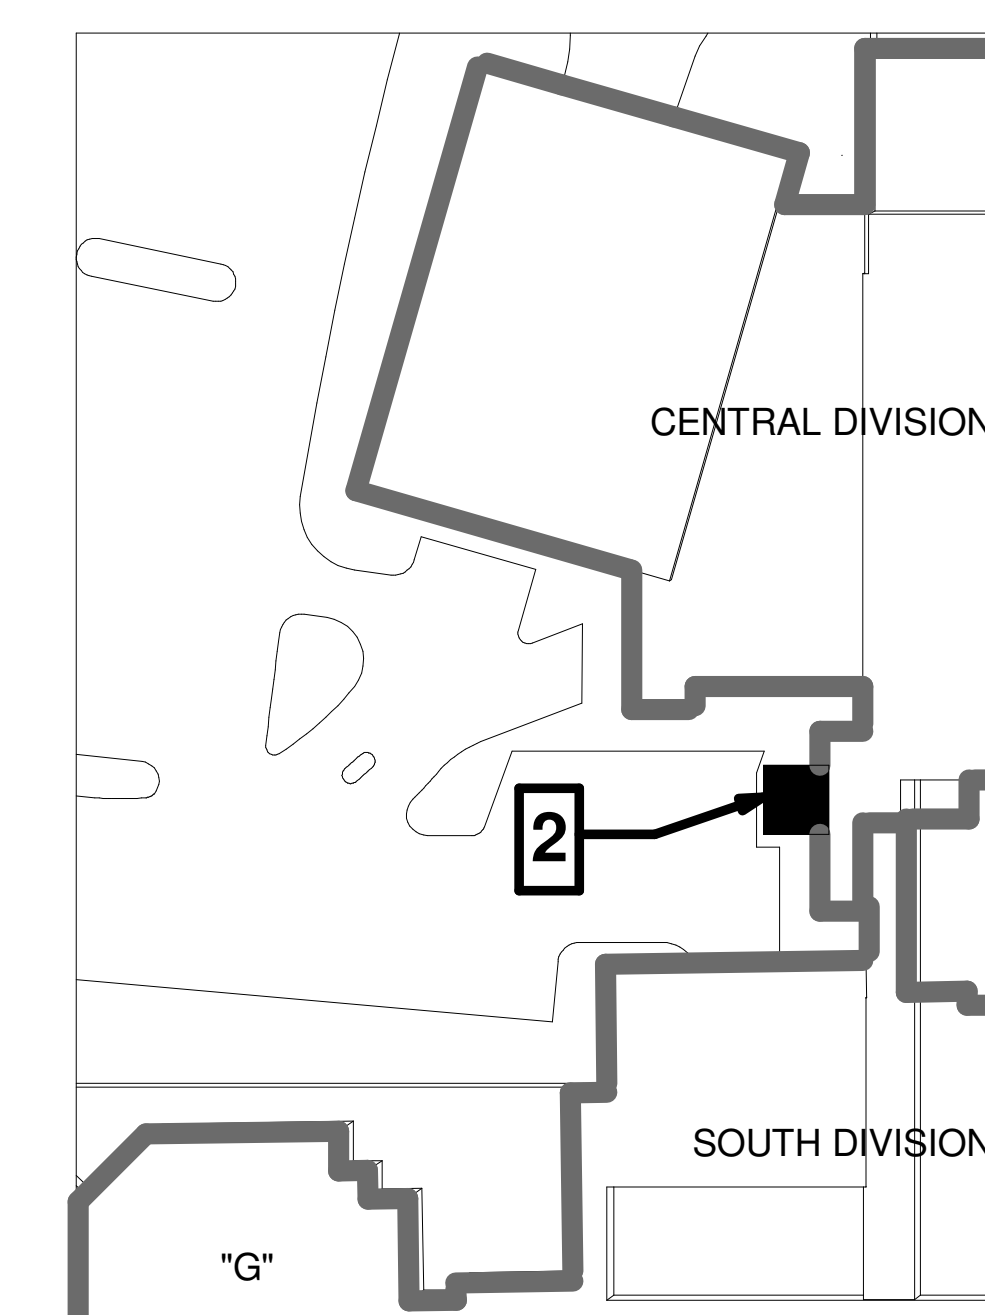

## 2 ELEVATOR ADDITION LOCATION

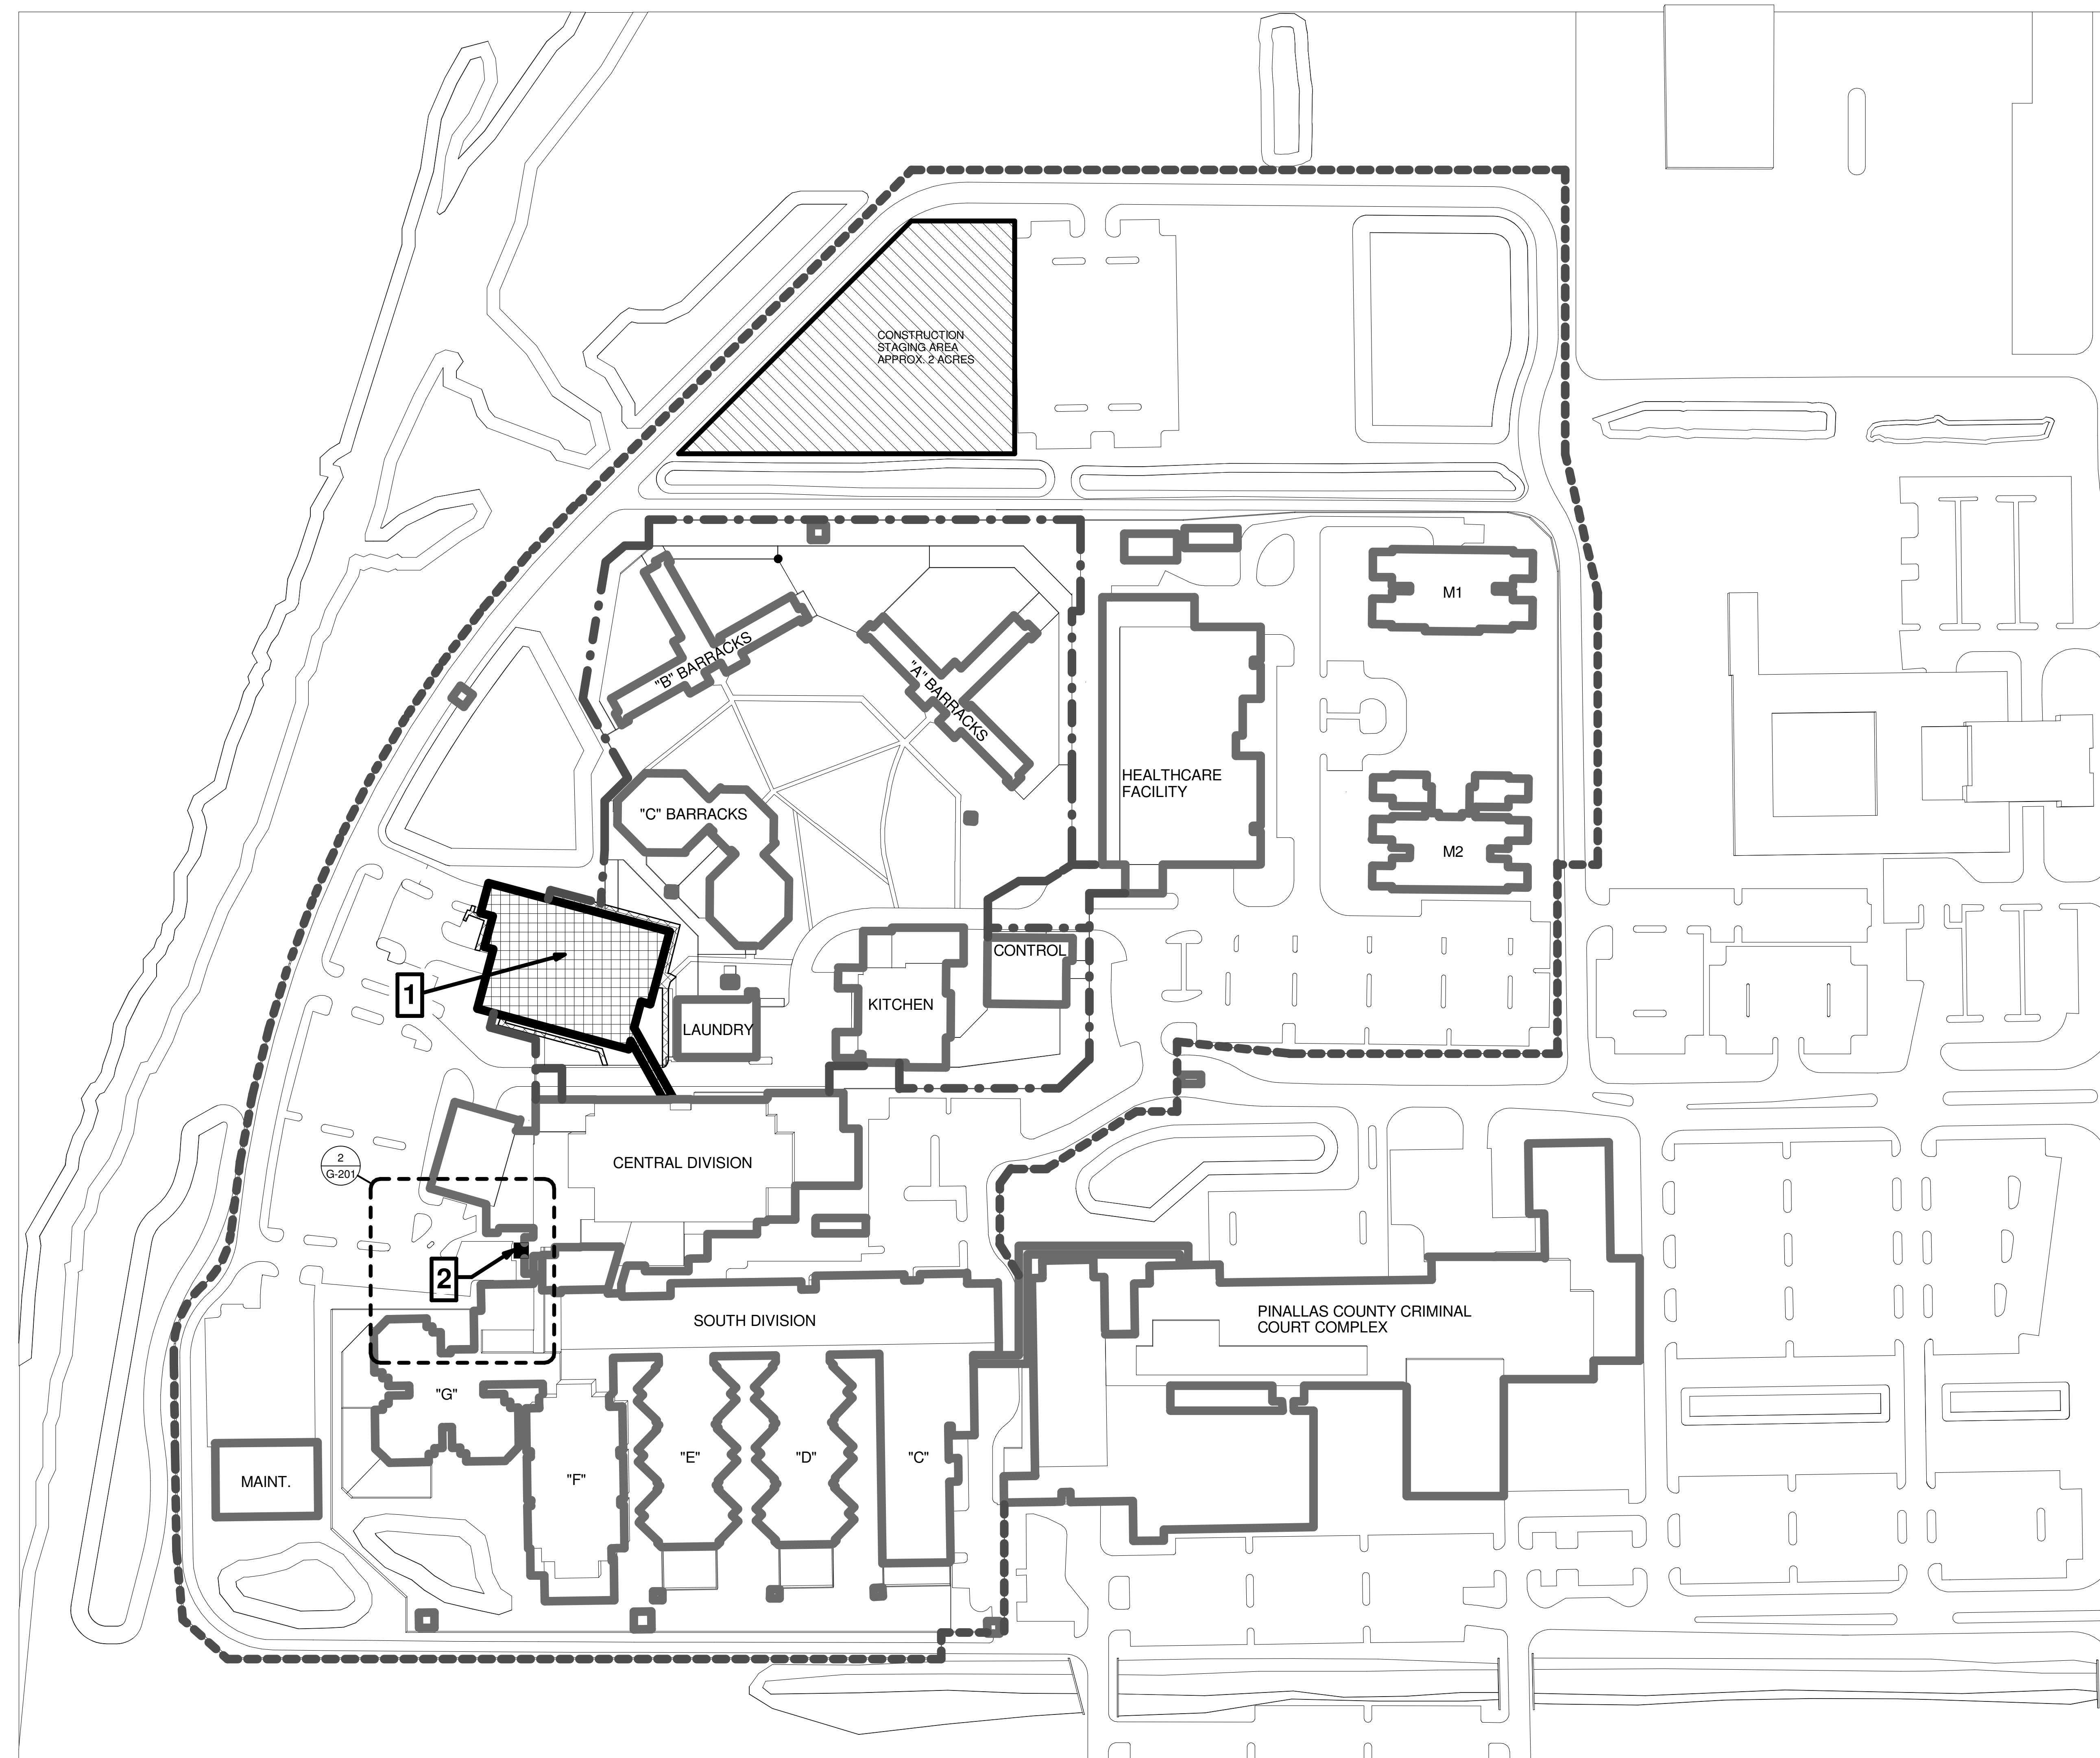

**1 PHASE 2**  
Scale: 1" = 100'-0"



- 1) A TEMPORARY SECURE PERIMETER SHALL BE MAINTAINED AT ALL TIMES IN ORDER TO SEPARATE THE DEMOLITION AND CONSTRUCTION ACTIVITIES FROM THE INMATE POPULATION.
- 2) ACCESS AND SERVICES TO EXISTING FACILITIES TO REMAIN SHALL BE MAINTAINED TO BE USED BY INMATES.
- 3) INTERRUPTIONS TO EXISTING ACCESS OR OPERATIONS SHALL BE LIMITED AND COORDINATED WITH THE FACILITY IN ADVANCE OF THE INTERRUPTION
- 4) COORDINATE SELECTIVE DEMOLITION AND/OR RENOVATION OF ANCILLARY STRUCTURES REQUIRED TO PHASE CONSTRUCTION.
- 5) REFER TO CIVIL DRAWINGS FOR SITE DEVELOPMENT CRITERIA AND INFORMATION RELATED TO ADDITIONAL SUB PHASING.
- 6) CONSTRUCT SIDEWALKS TO PROVIDE LAUNDRY AND KITCHEN CART ACCESS BETWEEN THE INFRASTRUCTURE BUILDING AND HEALTHCARE FACILITY DURING THE DEMOLITION OF ITEMS 1,2,3 & 4 INDICATED ON THIS PLAN.


- 1 DEMOLITION OF EXISTING LAUNDRY BUILDING.
- 2 DEMOLITION OF EXISTING KITCHEN BUILDING.
- 3 DEMOLITION OF EXISTING CONTROL BUILDING.
- 4 DEMOLITION OF EXISTING ANCILLARY OUTBUILDINGS.
- 5 CONSTRUCTION OF FACILITY MAINTENANCE BUILDING.
- 6 CONSTRUCTION OF WAREHOUSE BUILDING.
- 7 RENOVATION OF EXISTING SOUTH KITCHEN (FIRST FLOOR)
- 8 DEMOLITION OF SITE FENCING, REFER TO CIVIL CRITERIA DRAWINGS



EXISTING BUILDING

EXISTING SECURE PERIMETER FENCE

EXISTING SITE PERIMETER FENCE

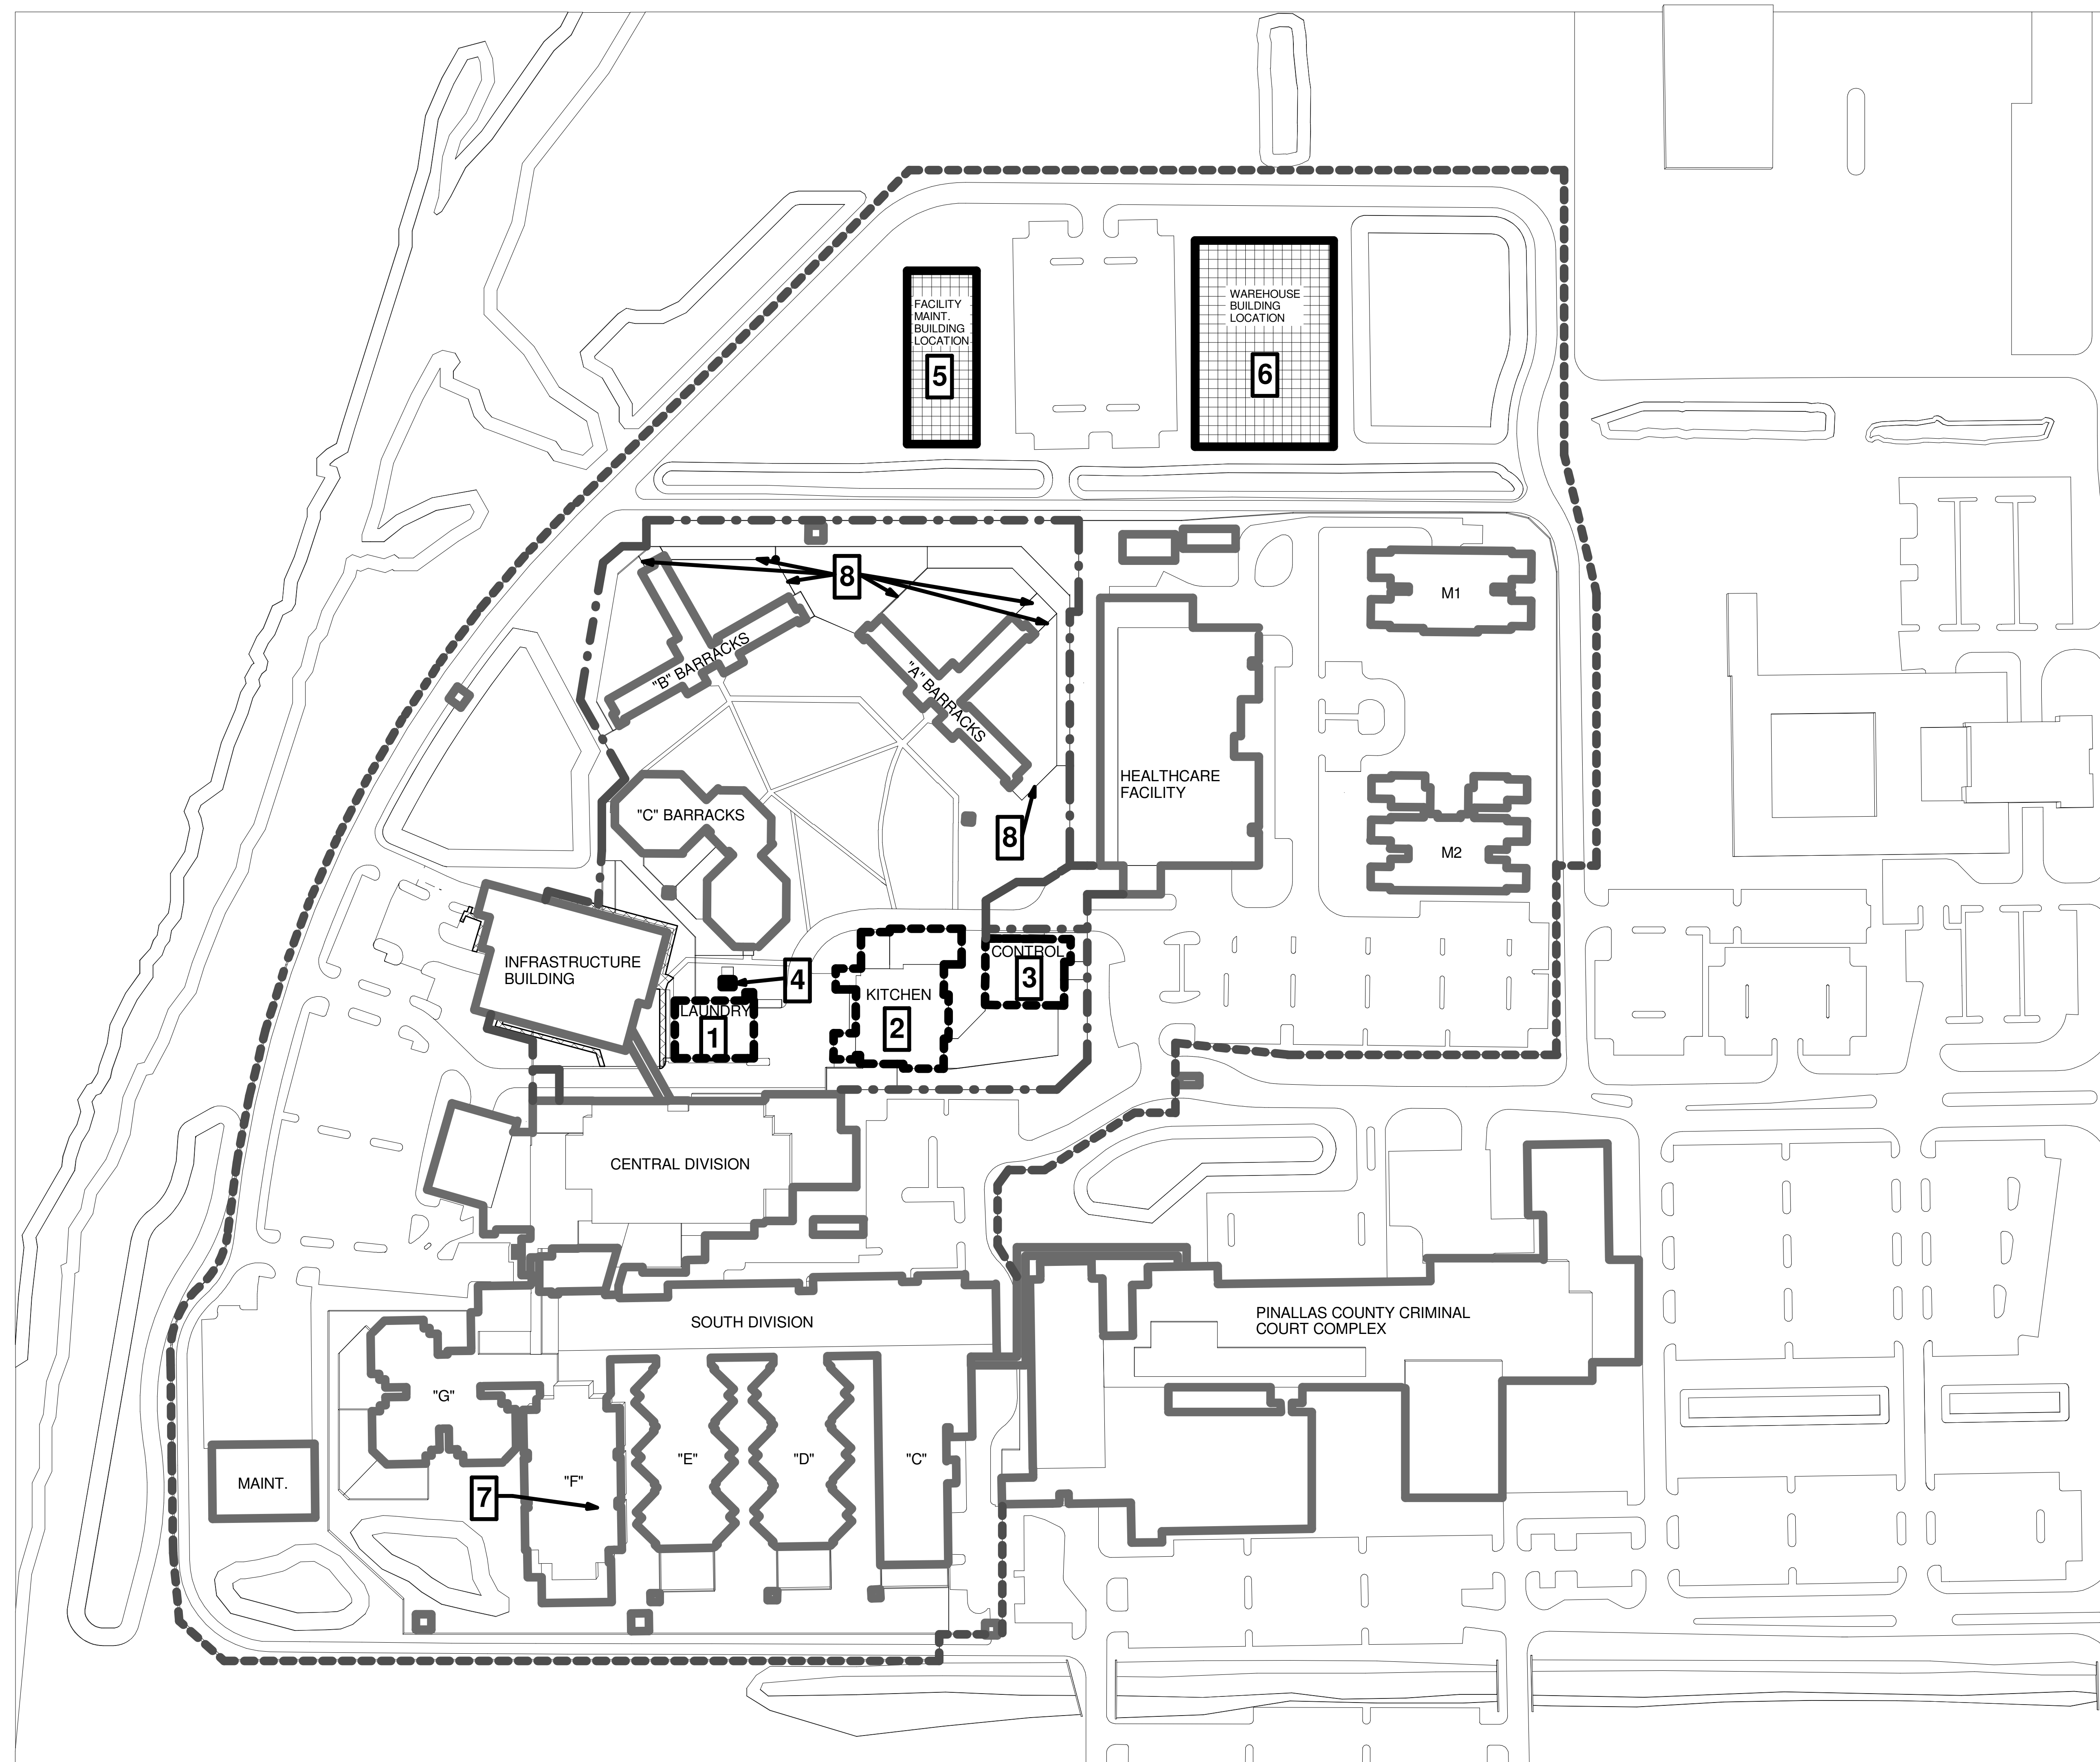

**1 PHASE 3**  
Scale: 1" = 100'-0"

Pinellas County  
Upgrade Jail Campus Infrastructure  
Phase 1 Design Criteria  
114400 North 49th Street  
Clearwater, FL

SEAL

PRELIMINARY DOCUMENTS  
NOT FOR CONSTRUCTION

## KEY PLAN

SCALE

$$1'' = 100'-0''$$
[illegible]

## REVISIONS

|             |            |
|-------------|------------|
| DRAWN BY    | MDR        |
| APPROVED BY | LWB        |
| CHECKED BY  | CRD        |
| DATE        | 03/19/2014 |

TITLE

## CONCEPTUAL CONSTRUCTION PHASING PLAN - PHASE 3

|             |          |
|-------------|----------|
| PROJECT NO. | 50057109 |
|-------------|----------|

G-202

SHEET NO.



- 1) A TEMPORARY SECURE PERIMETER SHALL BE MAINTAINED AT ALL TIMES IN ORDER TO SEPARATE THE DEMOLITION AND CONSTRUCTION ACTIVITIES FROM THE INMATE POPULATION.
- 2) ACCESS AND SERVICES TO EXISTING FACILITIES TO REMAIN SHALL BE MAINTAINED TO ENSURE CONTINUED OPERATIONS.
- 3) INTERRUPTIONS TO EXISTING ACCESS OR OPERATIONS SHALL BE LIMITED AND COORDINATED WITH THE FACILITY IN ADVANCE OF THE INTERRUPTION.
- 4) REFER TO CIVIL DRAWINGS FOR SITE DEVELOPMENT CRITERIA AND INFORMATION RELATED TO ADDITIONAL SUB PHASING.


**1** CONSTRUCTION OF COVERED SIDEWALK TO PROVIDE PERMANENT FOOD AND LAUNDRY CART ACCESS BETWEEN INFRASTRUCTURE BUILDING AND HEALTH CARE BUILDING. COVERED SIDEWALK SHOULD BE DONE AS SOON AS POSSIBLE BUT COORDINATED WITH CONSTRUCTION AND DEMOLITION; FOOD CART ACCESS TO HEALTHCARE FACILITY SHOULD BE MAINTAINED THROUGHOUT CONSTRUCTION. REFER TO CIVIL FOR ADDITIONAL CRITERIA INFORMATION

- 2** CONSTRUCTION OF FINAL SITE FENCING, REFER TO CIVIL FOR ADDITIONAL CRITERIA INFORMATION

 EXISTING BUILDING

 EXISTING SECURE PERIMETER FENCE

 EXISTING SITE PERIMETER FENCE

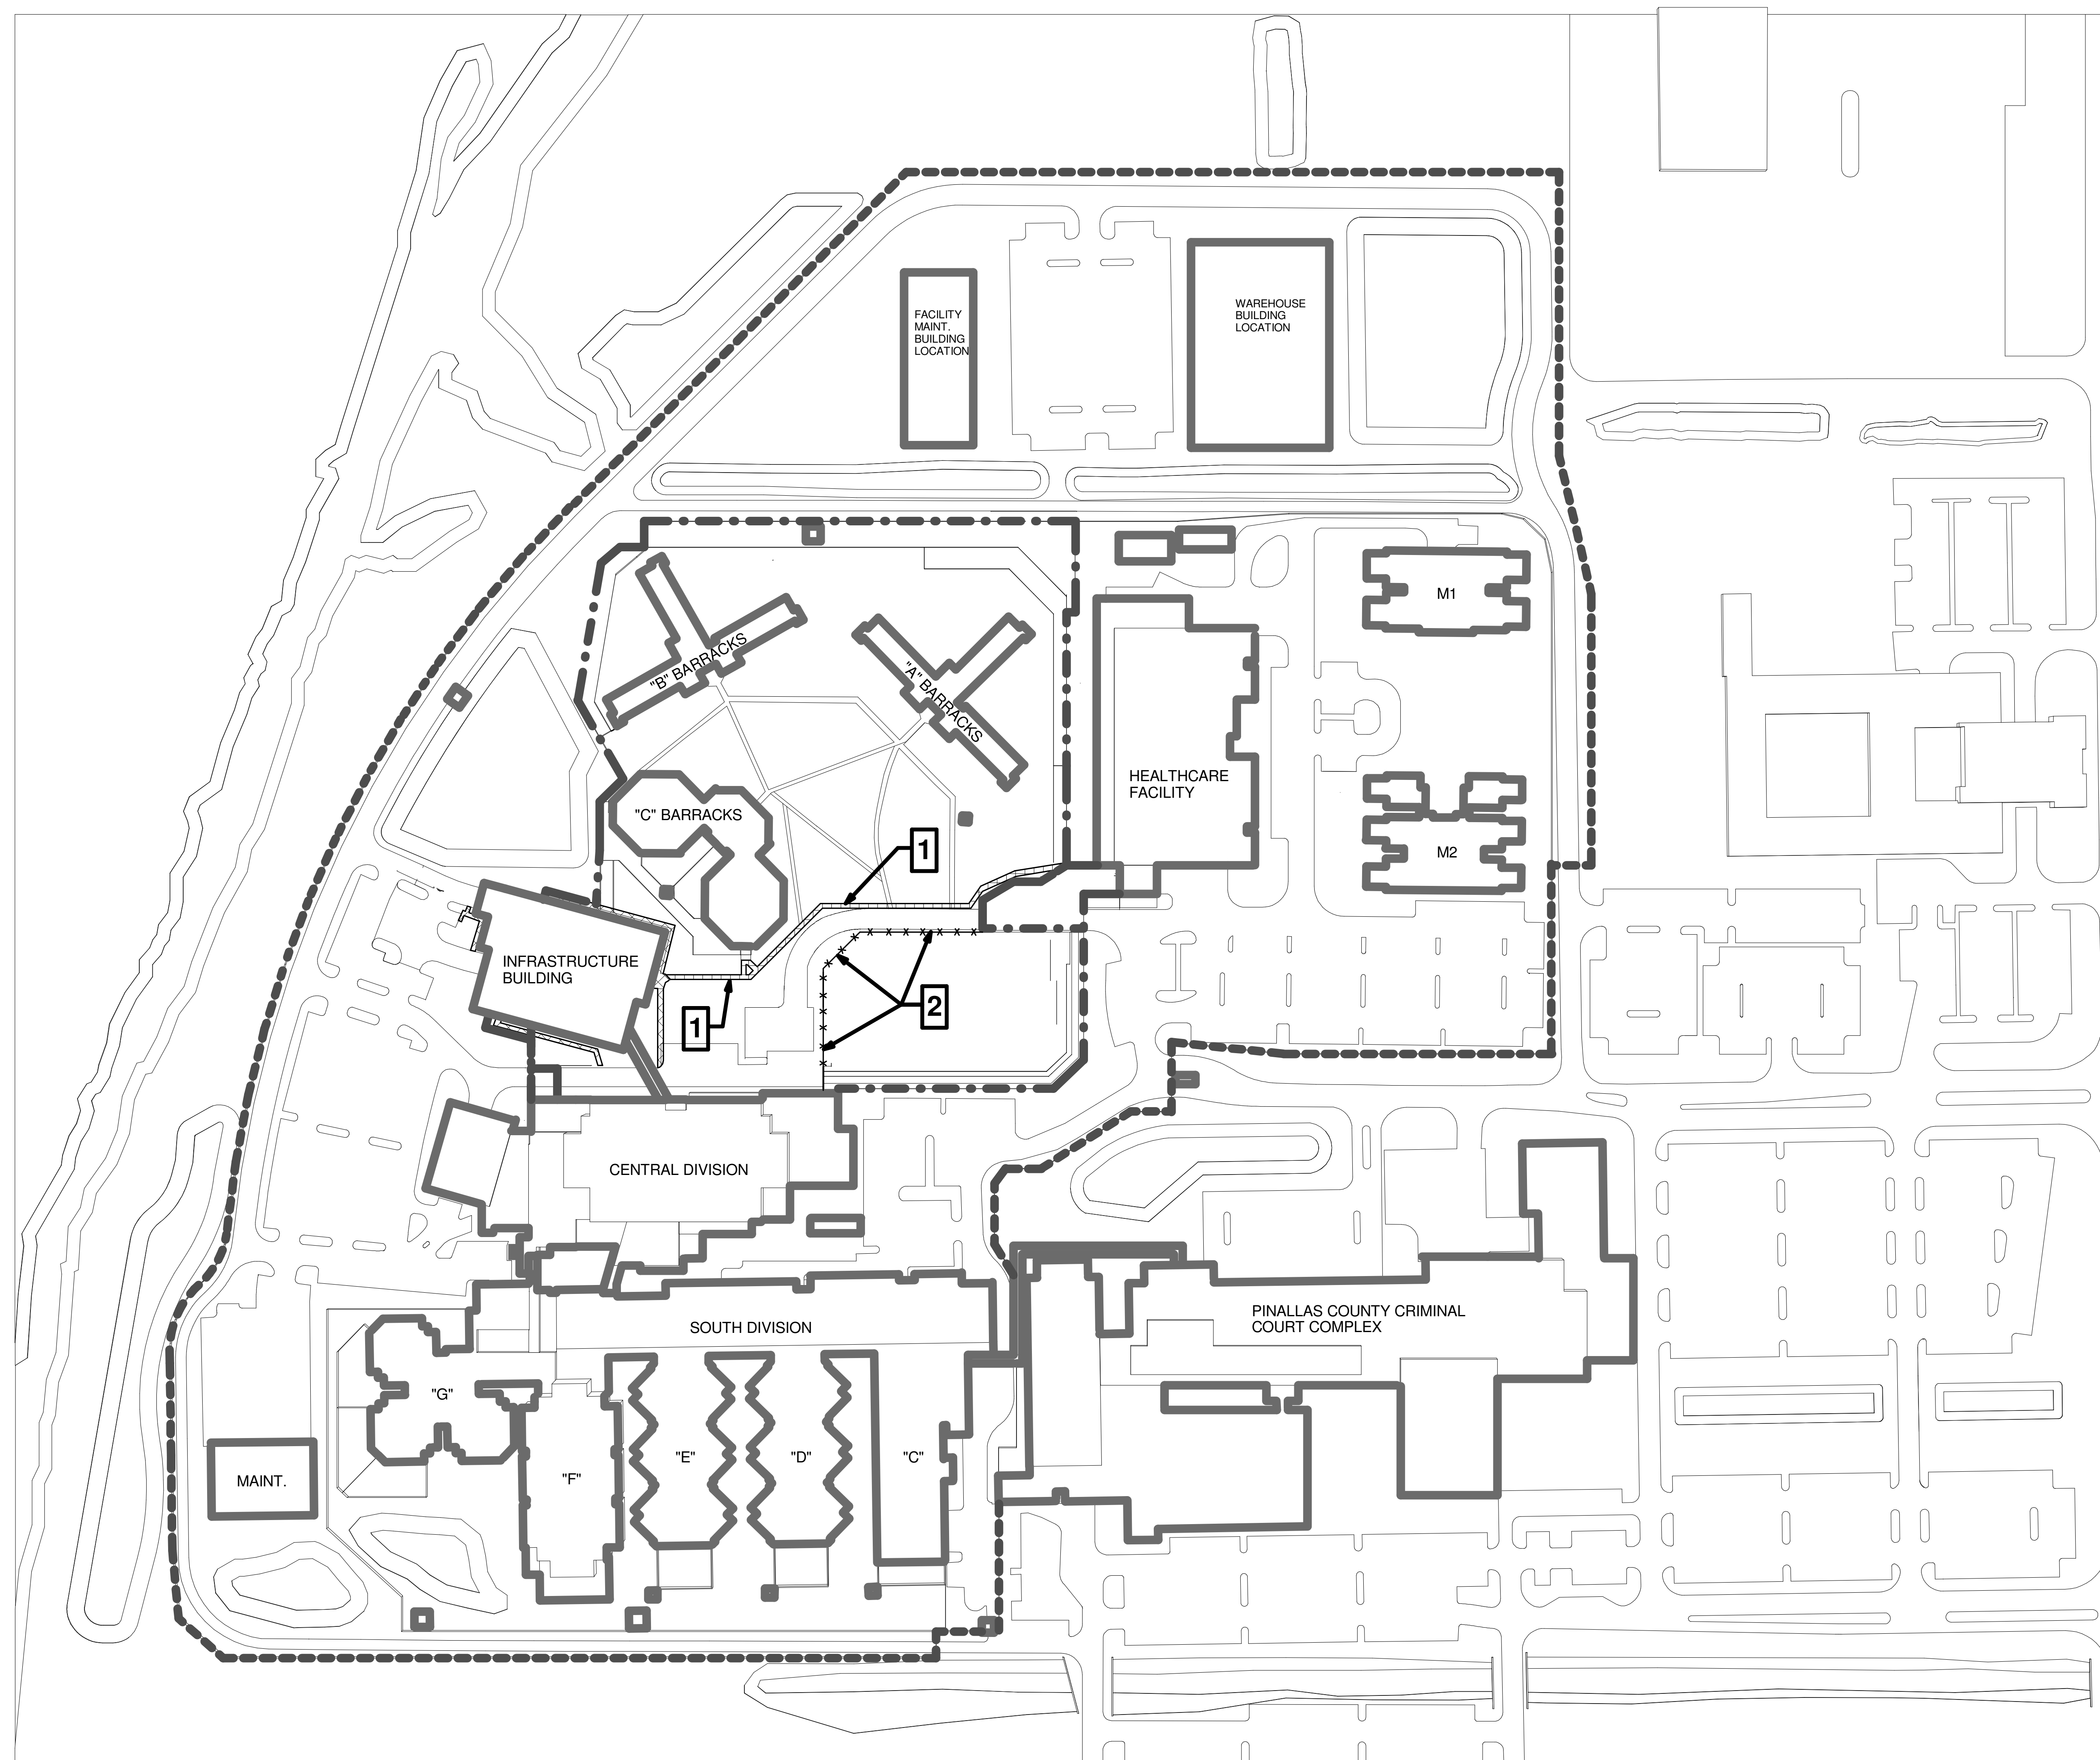

Pinellas County  
Upgrade Jail Campus Infrastructure  
Phase 1 Design Criteria  
114400 North 49th Street  
Clearwater, FL

SEAL

PRELIMINARY DOCUMENTS  
NOT FOR CONSTRUCTION

## KEY PLAN

SCALE

$$1'' = 100'-0''$$
[illegible]

## REVISIONS

|             |            |
|-------------|------------|
| DRAWN BY    | MDR        |
| APPROVED BY | LWB        |
| CHECKED BY  | CRD        |
| DATE        | 03/19/2014 |

TITLE

## CONCEPTUAL CONSTRUCTION PHASING PLAN - PHASE 4

|             |          |
|-------------|----------|
| PROJECT NO. | 50057109 |
|-------------|----------|

G-203

SHEET NO.